
STORM
L25026-N-3K


IP66 IK10

STORM 18W 3000K 1400lm 3h IP66 M/NM BLACK AUT



CODE	L25026-N-3K
POWER (W)	18W
AUTONOMY (U)	3h
TYPE	Not permanent-Permanent
RESCUE (LM)	1400lm
PERMANENT (LM)	1400lm
BATTERY	LI-FEPO4

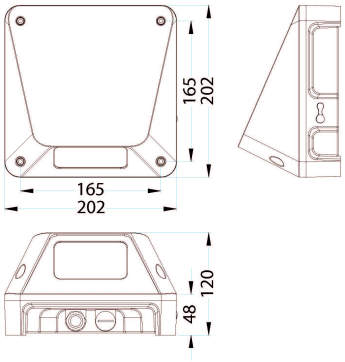

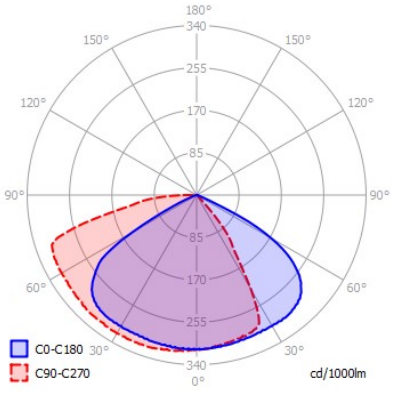

Features

PRODUCT NAME	STORM
PRODUCT FUNCTION	LUMINAIRES DE SECOURS LED HERMÉTIQUES
SYSTEM POWER (W) :	18W
LIGHT OUTPUT IN EMERGENCY MODE (LM) :	1400lm
CONTINUOUS MODE LUMINOUS FLOW (LM) :	1400lm

LINERGY
EMERGENCY LIGHTING

STORM
L25026-N-3K

SURVEILLANCE SYSTEM INSTALLATION	AUTO-TEST AUTOMATIQUE
WITH CONNECTION TO A IMPULSE RELAY	YES
POWER SUPPLY (V) :	220-230V
BATTERY	LiFePO4 6,4V - 6Ah
BATTERY RECHARGE TIME (H) :	24H
LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES
PROTECTION CLASS	IP66
HOUSING MATERIAL	FONTE D'ALUMINIUM
HOUSING COLOUR	NOIR RAL 7021
MATERIAL OF THE COVER	VERRE TRANSPARENT
IMPACT RESISTANCE	IK10
HEIGHT/DEPTH (MM) :	120mm
LENGTH (MM) :	202mm
WIDTH (MM) :	202mm
INCANDESCENT WIRE 850°C	OUI
BATTERY STATUS	LI-FEPO4
VOLTAGE TYPE	AC
NONIMAL LIFETIME L70/B50 (H) :	100.000H
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	-20°C / +40 °C
COLOUR TEMPERATURE	3000K
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
BEBAT CODE	B110020825
RECUPEL CODE	5.56
BATTERY WEIGHT (G) :	296 gr.
EAN	9900000009793
EAN PACK	9900000010089
INTRASTAT CODE	85365000
COMPLIANT WITH EUROPEAN STANDARDS	EN 1838 EN 60598-1 EN 60598-2-22 EN 62034
FUNCTION	Ambient and evacuation lighting Twilight
INSTALLATION METHOD	Surface mounting (wall)
LIGHT DISTRIBUTION ELEMENT	Reflector
MODE	Autotest Light ON/OFF Security

NOMINAL OPERATING TIME	3h
PROTECTION CLASS	I
TYPE OF SWITCHING	Not permanent Permanent