TREND-XL65-ICE
L0627-N-ICE-DALI


IP65 IK10


TREND XL65 ICE 5W 600lm 1h 210lm 3h P/NP BLACK DALI

The TREND XL65 ICE, a high-quality multifunctional waterproof model with exceptional shock resistance (IK10) thanks to its polycarbonate body. It also withstands extreme temperatures from -40°C to +80°C. Available in 2 colors: white and black.



CODE	L0627-N-ICE-DALI
POWER (W)	5W
AUTONOMY (U)	1h
	3h
TYPE	Not permanent-
	Permanent
RESCUE (LM)	600lm (1h) 210lm (3h)
PERMANENT (LM)	400lm
BATTERY	LITHIUM TITANIUM

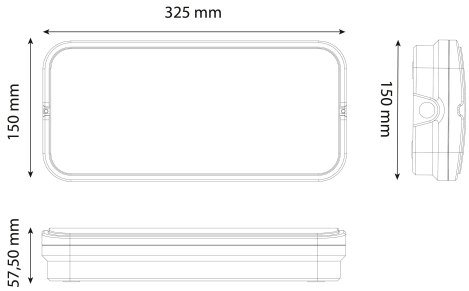

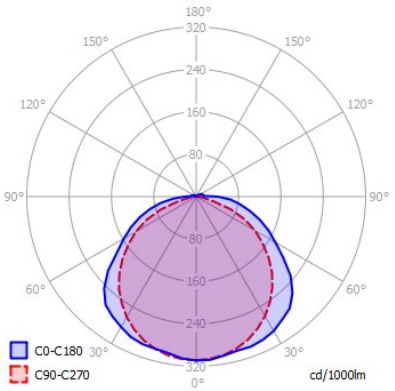

Features

PRODUCT NAME	TREND-XL65-ICE
PRODUCT FUNCTION	LUMINAIRES DE SECOURS LED HERMÉTIQUES

TREND-XL65-ICE
L0627-N-ICE-DALI

SYSTEM POWER (W) :	5W
LIGHT OUTPUT IN EMERGENCY MODE (LM) :	600lm (1h) 210lm (3h)
CONTINUOUS MODE LUMINOUS FLOW (LM) :	400lm
SURVEILLANCE SYSTEM INSTALLATION	AUTO-TEST AUTOMATIQUE + TOUCHE DE CONTRÔLE
POWER SUPPLY (V) :	220-230V
BATTERY	LTO 4,8V - 1,5Ah
BATTERY RECHARGE TIME (H) :	24H
LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES
PROTECTION CLASS	IP65
HOUSING MATERIAL	POLYCARBONATE
HOUSING COLOUR	NOIR RAL 9005
MATERIAL OF THE COVER	TRANSPARENTE PLASTIC
IMPACT RESISTANCE	IK10
HEIGHT/DEPTH (MM) :	58mm
LENGTH (MM) :	325mm
WIDTH (MM) :	150mm
MOUNTING WIDTH	325mm
PRODUCT WEIGHT (G) :	844GR
INCANDESCENT WIRE 850°C	OUI
CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC	YES
BATTERY STATUS	LITHIUM TITANIUM
VOLTAGE TYPE	AC
NONIMAL LIFETIME L70/B50 (H) :	50.000H (L70B50)
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	-30°C / +80 °C
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
ENEC	YES
INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES	YES
BEBAT CODE	B110020590
RECUPEL CODE	5.56
BATTERY WEIGHT (G) :	82 gr.
EAN	9900000011376
COMPLIANT WITH EUROPEAN STANDARDS	EN 1838 EN 60598-1 EN 60598-2-22 EN 62034

TREND-XL65-ICE
L0627-N-ICE-DALI

FUNCTION	Ambient and evacuation lighting Ambient lighting (anti-panic)
INSTALLATION METHOD	Surface mounted recessed Surface mounting (ceiling) Surface mounting (wall) Surface mounting (wall/ceiling)
LIGHT DISTRIBUTION ELEMENT	Reflector
MODE	Dali Security
NOMINAL OPERATING TIME	1h 3h
PICTOGRAM VISIBILITY	Only on one side
PROTECTION CLASS	II
TYPE OF PICTOGRAM	Placed sheet/plate
TYPE OF SWITCHING	Not permanent Permanent

Accessories

L0627-1 - TREND XL65 INSERT PICTO LEFT 

L0627-2 - TREND XL65 INSERT PICTO RIGHT 

L0627-3 - TREND XL65 INSERT PICTO RIGHT DOWN 

L0627-4 - TREND XL65 INSERT PICTO RIGHT EXIT 

L0627-6 - TREND XL65 INSERT PICTO FIRE EXTINGUISHER 

L0627-7 - TREND XL65 INSERT PICTO HYDRANT 

L0627-5 - TREND XL65 INSERT PICTO RIGHT OPALIN 

L99000 - STEP PROTECTION GRID 