# TREND-XL65
# L0627-N-DALI


IP65 IK10


**TREND XL65 5W 1000lm 1h 600lm 3h P/NP BLACK DALI**

The TREND XL65 is a high-quality, multifunctional waterproof model with exceptional shock resistance (IK10) thanks to its polycarbonate housing. It is available in two colours: white and black.



| | |
|---|---|
| **CODE** | L0627-N-DALI |
| **POWER (W)** | 5W |
| **AUTONOMY (U)** | 1h |
| | 3h |
| **TYPE** | Not permanent- |
| | Permanent |
| **RESCUE (LM)** | 1000lm (1h) 600lm (3h) |
| **PERMANENT (LM)** | 400lm |
| **BATTERY** | LI-FEPO4 |

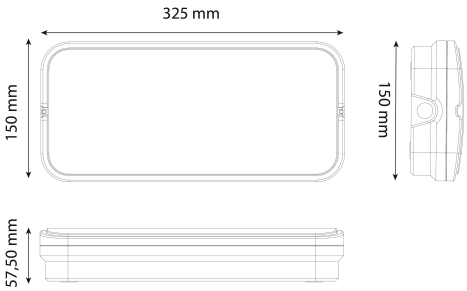

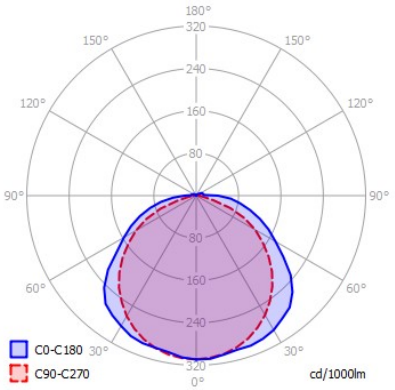
## Features

| | |
|---|---|
| PRODUCT NAME | TREND-XL65 |
| PRODUCT FUNCTION | LUMINAIRES DE SECOURS LED HERMÉTIQUES |
| SYSTEM POWER (W) : | 5W |

# TREND-XL65
## L0627-N-DALI

| | |
|---|---|
| LIGHT OUTPUT IN EMERGENCY MODE (LM) : | 1000lm (1h) 600lm (3h) |
| CONTINUOUS MODE LUMINOUS FLOW (LM) : | 400lm |
| SURVEILLANCE SYSTEM INSTALLATION | DALI |
| POWER SUPPLY (V) : | 220-230V |
| BATTERY | Li-FePO4 6,4V - 2Ah |
| BATTERY RECHARGE TIME (H) : | 24H |
| LIGHT SOURCE | LED |
| WITH LIGHT SOURCE | YES |
| PROTECTION CLASS | IP65 |
| HOUSING MATERIAL | POLYCARBONATE |
| HOUSING COLOUR | NOIR RAL 9005 |
| MATERIAL OF THE COVER | TRANSPARENTE PLASTIC |
| IMPACT RESISTANCE | IK10 |
| HEIGHT/DEPTH (MM) : | 58mm |
| LENGTH (MM) : | 325mm |
| WIDTH (MM) : | 150mm |
| MOUNTING WIDTH | 325mm |
| PRODUCT WEIGHT (G) : | 844GR |
| INCANDESCENT WIRE 850°C | OUI |
| CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC | YES |
| BATTERY STATUS | LI-FEPO4 |
| VOLTAGE TYPE | AC |
| NONIMAL LIFETIME L70/B50 (H) : | 50.000H (L70B50) |
| RATED AMBIENT TEMPERATURE TO IEC 62722-2-1 | -5°C / +55°C |
| GUARANTEE | 5 YEARS |
| TYPE OF PACKAGING | CARTON BOX |
| NUMBER OF UNITS IN PACKAGING | 1 |
| ENEC | YES |
| INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES | YES |
| BEBAT CODE | B110020590 |
| RECUPEL CODE | 5.56 |
| BATTERY WEIGHT (G) : | 82 gr. |
| EAN | 9900000010409 |
| INTRASTAT CODE | 85365000 |
| COMPLIANT WITH EUROPEAN STANDARDS | EN 1838<br>EN 60598-1<br>EN 60598-2-22 |
| FUNCTION | Ambient and evacuation lighting<br>Ambient lighting (anti-panic) |

| | |
|---|---|
| INSTALLATION METHOD | Surface mounted recessed<br>Surface mounting (ceiling)<br>Surface mounting (wall)<br>Surface mounting (wall/ceiling) |
| LIGHT DISTRIBUTION ELEMENT | Reflector |
| MODE | Dali<br>Security |
| NOMINAL OPERATING TIME | 1h<br>3h |
| PICTOGRAM VISIBILITY | Only on one side |
| PROTECTION CLASS | II |
| TYPE OF PICTOGRAM | Placed sheet/plate |
| TYPE OF SWITCHING | Not permanent<br>Permanent |

## Accessories

**L0627-1** - TREND XL65 INSERT PICTO LEFT 

**L0627-2** - TREND XL65 INSERT PICTO RIGHT 

**L0627-3** - TREND XL65 INSERT PICTO RIGHT DOWN 

**L0627-4** - TREND XL65 INSERT PICTO RIGHT EXIT 

**L0627-6** - TREND XL65 INSERT PICTO FIRE EXTINGUISHER 

**L0627-7** - TREND XL65 INSERT PICTO HYDRANT 

**L0627-5** - TREND XL65 INSERT PICTO RIGHT OPALIN 

**L99000** - STEP PROTECTION GRID 