TREND
L0625-B


IP42 IK08


TREND LED 3W 434lm 1h M/NM WHITE

The Trend is an emergency unit that is easy to install and can be integrated with great precision (standard or customized). It features a tactile test button and is available in white or black.



CODE	L0625-B
POWER (W)	3W
AUTONOMY (U)	1h
TYPE	Not permanent-Permanent
RESCUE (LM)	434lm
PERMANENT (LM)	255lm
BATTERY	LI-FEPO4

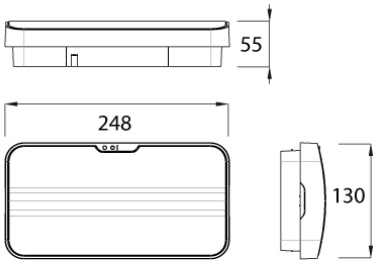

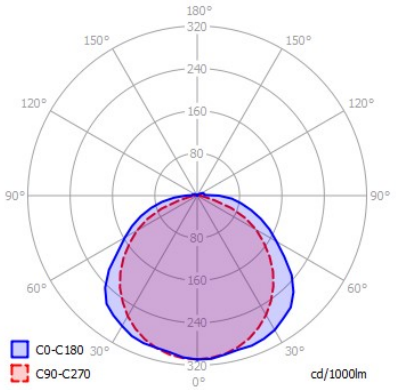

Features

PRODUCT NAME	TREND
PRODUCT FUNCTION	LUMINAIRES DE SECOURS LED NON-HERMÉTIQUES
SYSTEM POWER (W) :	3W

LIGHT OUTPUT IN EMERGENCY MODE (LM) :	434lm
CONTINUOUS MODE LUMINOUS FLOW (LM) :	255lm
SURVEILLANCE SYSTEM INSTALLATION	AUTO-TEST AUTOMATIQUE + TOUCHE DE CONTRÔLE
WITH CONNECTION TO A IMPULSE RELAY	YES
POWER SUPPLY (V) :	220-230V
BATTERY	Li-FePO4 6,4V - 1,5Ah
BATTERY RECHARGE TIME (H) :	24H
LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES
PROTECTION CLASS	IP42
HOUSING MATERIAL	POLYCARBONATE
HOUSING COLOUR	WHITE RAL 9003
MATERIAL OF THE COVER	TRANSPARENTE PLASTIC
IMPACT RESISTANCE	IK08
HEIGHT/DEPTH (MM) :	55mm
LENGTH (MM) :	248mm
WIDTH (MM) :	130mm
MOUNTING WIDTH	248mm
PRODUCT WEIGHT (G) :	800GR
INCANDESCENT WIRE 850°C	OUI
CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC	YES
BATTERY STATUS	LI-FEPO4
VOLTAGE TYPE	AC
NONIMAL LIFETIME L70/B50 (H) :	50.000H (L70B50)
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	-5°C / +55°C
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
ENEC	YES
INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES	YES
BEBAT CODE	B110020590
RECUPEL CODE	5.56
BATTERY WEIGHT (G) :	82 gr.
EAN	9900000000011
EAN PACK	9900000005481
INTRASTAT CODE	85365000
PACKAGING UNIT	1


BEBAT QUANTITY	1
GTIN (EAN/UPC) UNIT	9900000000011
UNIT OF WEIGHT	gr.
ETIM CODE	EC001957
MIN CROSS SECTION WIRE (MM2) :	0,75
CROSS SCTION WIRE (MM2) :	2,5
CONNECTION TYPE	SPRING TERMINAL
COMPLIANT WITH EUROPEAN STANDARDS	EN 1838 EN 60598-1 EN 60598-2-22
FUNCTION	Ambient and evacuation lighting Ambient lighting (anti-panic)
INSTALLATION METHOD	Surface mounted recessed Surface mounting (ceiling) Surface mounting (wall) Surface mounting (wall/ceiling)
LIGHT DISTRIBUTION ELEMENT	Reflector
MODE	Autotest Security
NOMINAL OPERATING TIME	1h
PROTECTION CLASS	II
TYPE OF PICTOGRAM	Placed sheet/plate
TYPE OF SWITCHING	Not permanent Permanent

Accessories

L99200-B - TREND RECESSED KIT WHITE



L0625-BOX-IP65 - TREND BOX IP65 - IK10



L99933-1-2 - TREND PLEXI 200x110 LEFT & RIGHT



L99933-3 - TREND PLEXI 200x110 DOWN



L99933-5 - TREND PLEXI 200x110 EXIT



L99933-6 - TREND PLEXI 200x110 TRANSPARENT



L99932-1 - TREND INSERT PICTO LEFT



L99932-2 - TREND INSERT PICTO RIGHT



L99932-3 - TREND INSERT PICTO DOWN



L99932-5 - TREND INSERT PICTO EXIT



L99932-6 - PICTO TREND TO INSERT OPALIN



L99932-7 - TREND INSERT PICTO HYDRANT



L99024 - TREND PROTECTION GRID

