TUBE-
L6211-90-SE-DET-WIR


IP67 IK10


TUBE 9/17W 4000K 1350/2300lm - 620lm IP67 + EMERGENCY + SENSOR WIRELESS

The TUBE LED is a tubular, industrial-style, multifunctional model that offers very high luminous output, exceptional impact resistance (IK10), and excellent waterproofing thanks to its 3.5 mm thick UV-resistant polycarbonate tube.



CODE	L6211-90-SE-DET-WIR
POWER (W)	9W-12W-14W-17W
AUTONOMY (U)	1h
TYPE	Not permanent-Permanent
RESCUE (LM)	620lm
PERMANENT (LM)	1350lm-1650lm-2000lm-2300lm
BATTERY	LI-FEPO4



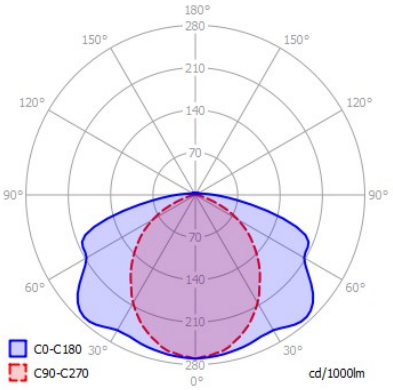

Features

PRODUCT NAME	TUBE-
PRODUCT FUNCTION	LUMINAIRES DE SECOURS LED HERMÉTIQUES

LINERGY EMERGENCY LIGHTING

TUBE-L6211-90-SE-DET-WIR

SYSTEM POWER (W) :	9W-12W-14W-17W
CONSUMPTION POWER (ABSORPTION)	9W-17W
LIGHT OUTPUT IN EMERGENCY MODE (LM) :	620lm
CONTINUOUS MODE LUMINOUS FLOW (LM) :	1350lm-1650lm-2000lm-2300lm
SURVEILLANCE SYSTEM INSTALLATION	WIRELESS
WITH CONNECTION TO A IMPULSE RELAY	YES
POWER SUPPLY (V) :	220-230V
BATTERY	Li-FeP04 3,2V 3Ah
LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES
PROTECTION CLASS	IP67
HOUSING MATERIAL	POLYCARBONATE
HOUSING COLOUR	GREY RAL 9007
MATERIAL OF THE COVER	POLYCARBONATE OPAL
IMPACT RESISTANCE	IK10
HEIGHT/DEPTH (MM) :	90mm
LENGTH (MM) :	630mm
WIDTH (MM) :	90mm
MOUNTING WIDTH	630mm
PRODUCT WEIGHT (G) :	1040GR
INCANDESCENT WIRE 850°C	OUI
BATTERY STATUS	LI-FEPO4
VOLTAGE TYPE	AC
MAX. OF LUMINAIRES PER B16 CIRCUIT BREAKER (TWO-POLE)	83
MAX. OF LUMINAIRES PER C16 CIRCUIT BREAKER (SINGLE)	138
NONIMAL LIFETIME L70/B50 (H) :	100.000H (L70/B50)
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	-5°C / +55°C
COLOUR TEMPERATURE	4000K
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES	YES
BEBAT CODE	B110020590
RECUPEL CODE	4.56
BATTERY WEIGHT (G) :	88 gr.
EAN	9900000003036
INTRASTAT CODE	85365000

TUBE-L6211-90-SE-DET-WIR

COMPLIANT WITH EUROPEAN STANDARDS	EN 1838 EN 60598-1 EN 60598-2-22
FUNCTION	Ambient and evacuation lighting Lighting with detection Twilight
INSTALLATION METHOD	Chain Surface mounting (ceiling) Surface mounting (wall) Surface mounting (wall/ceiling)
LIGHT DISTRIBUTION ELEMENT	Reflector
MODE	Light ON/OFF Security Wireless/Spy system wireless
NOMINAL OPERATING TIME	1h
PROTECTION CLASS	I
TYPE OF SWITCHING	Not permanent Permanent

Accessories

LTUBE-TRANS3P - TUBE TRANSVERSE WIRING 3P



LTUBE-TRANS5P - TUBE TRANSVERSE WIRING 5P



LATE002 - MALE CONNECTOR WIELAND RST20I5S



LATE003 - CONNECTOR FEMALE WIELAND RST20I5S



L6100 - 2-PIECE ANTI-VANDALISM MOUNTING

