TUBE-LED
L6222-90-DALI-CL2


IP67 IK10


TUBE 18/34W 4000K 2700/4600lm IP67 DALI

The TUBE LED is a tubular, industrial-style, multifunctional model that offers very high luminous output, exceptional impact resistance (IK10), and excellent waterproofing thanks to its 3.5 mm thick UV-resistant polycarbonate tube.



CODE	L6222-90-DALI-CL2
POWER (W)	18W-23W-29W-34W
AUTONOMY (U)	
TYPE	
RESCUE (LM)	
PERMANENT (LM)	2700lm-3350lm-3950lm-4600lm
BATTERY	



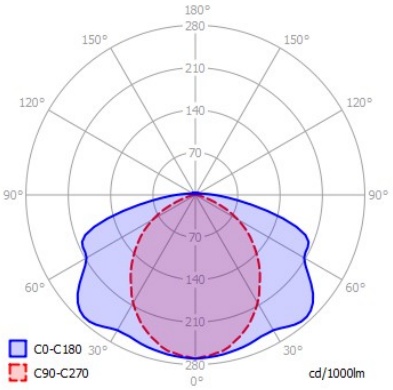

Features

PRODUCT NAME	TUBE-LED
PRODUCT FUNCTION	HERMETIC LED LIGHTING

LINERGY
EMERGENCY LIGHTING

TUBE-LED
L6222-90-DALI-CL2

SYSTEM POWER (W) :	18W-23W-29W-34W
CONSUMPTION POWER (ABSORPTION)	18W-34W
CONTINUOUS MODE LUMINOUS FLOW (LM) :	2700lm-3350lm-3950lm-4600lm
SURVEILLANCE SYSTEM INSTALLATION	DALI
WITH CONNECTION TO A IMPULSE RELAY	YES
POWER SUPPLY (V) :	220-230V
BATTERY	LiFePO4
LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES
PROTECTION CLASS	IP67
HOUSING MATERIAL	POLYCARBONATE
HOUSING COLOUR	GREY RAL 9007
MATERIAL OF THE COVER	POLYCARBONATE OPAL
IMPACT RESISTANCE	IK10
HEIGHT/DEPTH (MM) :	90mm
LENGTH (MM) :	1300mm
WIDTH (MM) :	90mm
MOUNTING WIDTH	1300mm
PRODUCT WEIGHT (G) :	1850GR
INCANDESCENT WIRE 850°C	OUI
WIRING TYPE	ADAPTE A UN CÂBLAGE TRANVERSANT
CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC	YES
VOLTAGE TYPE	AC
MAX. OF LUMINAIRES PER B16 CIRCUIT BREAKER (TWO-POLE)	83
MAX. OF LUMINAIRES PER C16 CIRCUIT BREAKER (SINGLE)	138
NONIMAL LIFETIME L70/B50 (H) :	100.000H (L70/B50)
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	-5°C / +55°C
COLOUR TEMPERATURE	4000K
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES	YES
BEBAT CODE	-
RECUPEL CODE	4.56
BATTERY WEIGHT (G) :	0
EAN	9900000003685
INTRASTAT CODE	85394900

TUBE-LED
L6222-90-DALI-CL2

COMPLIANT WITH EUROPEAN STANDARDS	EN 60598-1 EN 60598-2-22
FUNCTION	Ambient and evacuation lighting
INSTALLATION METHOD	Chain Hanging Surface mounting (ceiling) Surface mounting (wall) Surface mounting (wall/ceiling)
LIGHT DISTRIBUTION ELEMENT	Reflector
MODE	Dali Light ON/OFF
PROTECTION CLASS	II

Accessories

LTUBE-TRANS3P - TUBE TRANSVERSE WIRING 3P



LTUBE-TRANS5P - TUBE TRANSVERSE WIRING 5P



LATE002 - MALE CONNECTOR WIELAND RST20I5S



LATE003 - CONNECTOR FEMALE WIELAND RST20I5S



L6100 - 2-PIECE ANTI-VANDALISM MOUNTING

