# TUBE-LED
# L6528-90-DET-3K

IP67 IK10


**TUBE 23/43W 3000K 3350/5750lm IP67 + SENSOR**

The TUBE LED is a tubular, industrial-style, multifunctional model that offers very high luminous output, exceptional impact resistance (IK10), and excellent waterproofing thanks to its 3.5 mm thick UV-resistant polycarbonate tube.



| | |
|---|---|
| **CODE** | L6528-90-DET-3K |
| **POWER (W)** | 23W-29W-36W-43W |
| **AUTONOMY (U)** | |
| **TYPE** | |
| **RESCUE (LM)** | |
| **PERMANENT (LM)** | 3350lm-4200lm-4950lm-5750lm |
| **BATTERY** | |

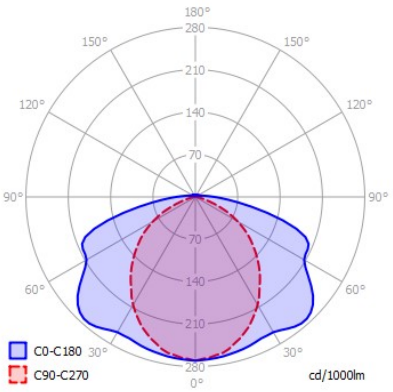


## Features

| | |
|---|---|
| PRODUCT NAME | TUBE-LED |
| PRODUCT FUNCTION | HERMETIC LED LIGHTING |

LINERGY
EMERGENCY LIGHTING

# TUBE-LED
# L6528-90-DET-3K

| | |
|---|---|
| SYSTEM POWER (W) : | 23W-29W-36W-43W |
| CONSUMPTION POWER (ABSORPTION) | 23W-43W |
| CONTINUOUS MODE LUMINOUS FLOW (LM) : | 3350lm-4200lm-4950lm-5750lm |
| SURVEILLANCE SYSTEM INSTALLATION | SANS |
| WITH CONNECTION TO A IMPULSE RELAY | YES |
| POWER SUPPLY (V) : | 220-230V |
| LIGHT SOURCE | LED |
| WITH LIGHT SOURCE | YES |
| PROTECTION CLASS | IP67 |
| HOUSING MATERIAL | POLYCARBONATE |
| HOUSING COLOUR | GREY RAL 9007 |
| MATERIAL OF THE COVER | POLYCARBONATE OPAL |
| IMPACT RESISTANCE | IK10 |
| HEIGHT/DEPTH (MM) : | 90mm |
| LENGTH (MM) : | 1570mm |
| WIDTH (MM) : | 90mm |
| MOUNTING WIDTH | 1570mm |
| PRODUCT WEIGHT (G) : | 3200GR |
| INCANDESCENT WIRE 850°C | OUI |
| WIRING TYPE | ADAPTE A UN CÂBLAGE TRANVERSANT |
| CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC | YES |
| VOLTAGE TYPE | AC |
| MAX. OF LUMINAIRES PER B16 CIRCUIT BREAKER (TWO-POLE) | 83 |
| MAX. OF LUMINAIRES PER C16 CIRCUIT BREAKER (SINGLE) | 138 |
| NONIMAL LIFETIME L70/B50 (H) : | 100.000H (L70/B50) |
| RATED AMBIENT TEMPERATURE TO IEC 62722-2-1 | -5°C / +55°C |
| COLOUR TEMPERATURE | 4000K |
| GUARANTEE | 5 YEARS |
| TYPE OF PACKAGING | CARTON BOX |
| NUMBER OF UNITS IN PACKAGING | 1 |
| INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES | YES |
| BEBAT CODE | - |
| RECUPEL CODE | 4.56 |
| BATTERY WEIGHT (G) : | 0 |
| EAN | 9900000002015 |
| INTRASTAT CODE | 85394900 |

# TUBE-LED
# L6528-90-DET-3K

| | |
|---|---|
| COMPLIANT WITH EUROPEAN STANDARDS | EN 60598-1<br>EN 60598-2-22 |
| FUNCTION | Lighting with detection<br>Twilight |
| INSTALLATION METHOD | Chain<br>Hanging<br>Surface mounting (ceiling)<br>Surface mounting (wall)<br>Surface mounting (wall/ceiling) |
| LIGHT DISTRIBUTION ELEMENT | Reflector |
| MODE | Light ON/OFF |
| PROTECTION CLASS | I |

## Accessories

**LTUBE-TRANS3P** - TUBE TRANSVERSE WIRING 3P



**LTUBE-TRANS5P** - TUBE TRANSVERSE WIRING 5P



**LATE002** - MALE CONNECTOR WIELAND RST20I5S



**LATE003** - CONNECTOR FEMALE WIELAND RST20I5S



**L6100** - 2-PIECE ANTI-VANDALISM MOUNTING

