TWINLIGHT-
L25025-3-AUT


IP65 IK08


TWINLIGHT 2x20W 3600lm 3h IP65 NM AUT

The TWINLIGHT LED is designed for lighting large spaces and/or high ceilings. It can be installed in an industrial environment or in a sports hall.



CODE	L25025-3-AUT
POWER (W)	2x20W
AUTONOMY (U)	3h
TYPE	Not permanent
RESCUE (LM)	3600lm
PERMANENT (LM)	
BATTERY	LI-FEPO4

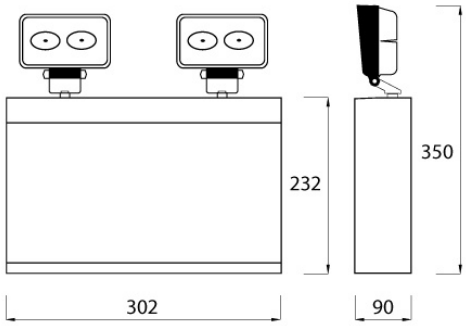

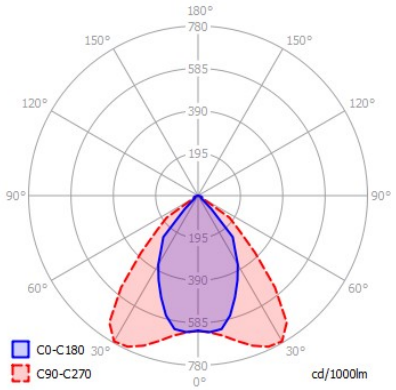

Features

PRODUCT NAME	TWINLIGHT-
PRODUCT FUNCTION	LUMINAIRES DE SECOURS LED HERMÉTIQUES
SYSTEM POWER (W) :	2x20W

LINERGY EMERGENCY LIGHTING

TWINLIGHT-L25025-3-AUT

LIGHT OUTPUT IN EMERGENCY MODE (LM) :	3600lm
POWER SUPPLY (V) :	220-230V
BATTERY	LiFePO4 12,8V - 6Ah
BATTERY RECHARGE TIME (H) :	24H
LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES
PROTECTION CLASS	IP65
HOUSING MATERIAL	POLYCARBONATE
HOUSING COLOUR	GRIS RAL 7035
MATERIAL OF THE COVER	POLYCARBONATE
IMPACT RESISTANCE	IK08
HEIGHT/DEPTH (MM) :	340mm
LENGTH (MM) :	302mm
WIDTH (MM) :	90mm
PRODUCT WEIGHT (G) :	3300GR
INCANDESCENT WIRE 850°C	OUI
CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC	YES
BATTERY STATUS	LI-FEPO4
VOLTAGE TYPE	AC
NONIMAL LIFETIME L70/B50 (H) :	50.000H (L70B50)
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	0°C / +60 °C
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES	YES
BEBAT CODE	B110020754
RECUPEL CODE	5.56
BATTERY WEIGHT (G) :	500 gr.
EAN	9900000009199
INTRASTAT CODE	85365000
COMPLIANT WITH EUROPEAN STANDARDS	EN 1838 EN 60598-1 EN 60598-2-22 EN 62034
FUNCTION	Evacuation lighting
INSTALLATION METHOD	Surface mounting (wall/ceiling)
LIGHT DISTRIBUTION ELEMENT	Reflector
MODE	Autotest Security

NOMINAL OPERATING TIME	3h
PROTECTION CLASS	II
TYPE OF SWITCHING	Not permanent

Accessories

LA311 - TWINLIGHT PICTO LEFT



LA312 - TWINLIGHT PICTO RIGHT



LA313 - TWINLIGHT PICTO DOWN

