# VIALED-EVO-MINIBOX-HIGH
## L8126HI-N-DALI-BOX


IP42 IK08 12 pcs

**VIALED EVO MINIBOX HIGH 4,8W 410lm 3h M/NM BLACK DALI**


The Vialed Evo MINIBOX HIGH is a minimalist version of the Vialed High, specially designed for ceiling heights of up to 10 meters. It comes standard with two lenses, one symmetrical and one asymmetrical, providing greater flexibility during installation.




| | |
|---|---|
| **CODE** | L8126HI-N-DALI-BOX |
| **POWER (W)** | 4,8W |
| **AUTONOMY (U)** | 3h |
| **TYPE** | Permanent |
| **RESCUE (LM)** | 410lm |
| **PERMANENT (LM)** | 410lm |
| **BATTERY** | |




A=130mm B=130mm
C=125mm D=40mm

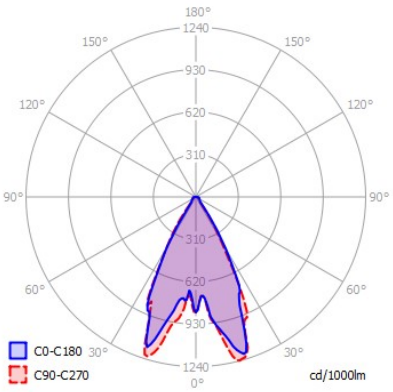

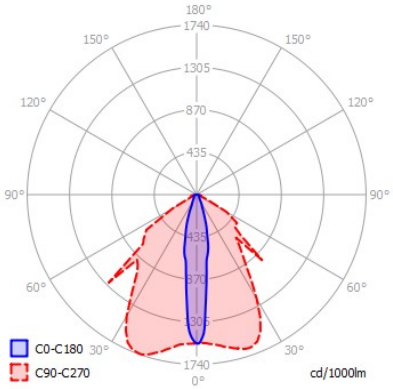
## Features

| | |
|---|---|
| PRODUCT NAME | VIALED-EVO-MINIBOX-HIGH |
| PRODUCT FUNCTION | LUMINAIRES DE SECOURS LED NON-HERMÉTIQUES |

# VIALED-EVO-MINIBOX-HIGH
## L8126HI-N-DALI-BOX

| | |
|---|---|
| SYSTEM POWER (W) : | 4,8W |
| LIGHT OUTPUT IN EMERGENCY MODE (LM) : | 410lm |
| CONTINUOUS MODE LUMINOUS FLOW (LM) : | 410lm |
| SURVEILLANCE SYSTEM INSTALLATION | DALI |
| WITH CONNECTION TO A IMPULSE RELAY | YES |
| WITH REMOTE CONTROL (COMMANDER) | YES |
| POWER SUPPLY (V) : | 220-230V |
| BATTERY | Li-FeP04 3,2V 3Ah |
| LIGHT SOURCE | LED |
| WITH LIGHT SOURCE | YES |
| PROTECTION CLASS | IP42 |
| HOUSING MATERIAL | POLYCARBONATE |
| HOUSING COLOUR | NOIR RAL 9005 |
| MATERIAL OF THE COVER | LENTILLE TRANSPARENTE |
| IMPACT RESISTANCE | IK08 |
| HEIGHT/DEPTH (MM) : | 40mm |
| LENGTH (MM) : | 130mm |
| WIDTH (MM) : | 130mm |
| MOUNTING WIDTH | 125mm |
| PRODUCT WEIGHT (G) : | 1200GR |
| NUMBER OF PRODUCTS PER BOX | 12 |
| INCANDESCENT WIRE 850°C | OUI |
| VOLTAGE TYPE | AC |
| NONIMAL LIFETIME L70/B50 (H) : | 50.000H (L70B50) |
| RATED AMBIENT TEMPERATURE TO IEC 62722-2-1 | 0°C / +40 °C |
| GUARANTEE | 5 YEARS |
| TYPE OF PACKAGING | CARTON BOX |
| NUMBER OF UNITS IN PACKAGING | 1 |
| INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES | YES |
| BEBAT CODE | B209035180 |
| RECUPEL CODE | 5.56 |
| BATTERY WEIGHT (G) : | 81 gr. |
| EAN | 8021046126235 |
| EAN PACK | 8021046360004 |

# VIALED-EVO-MINIBOX-HIGH
## L8126HI-N-DALI-BOX


| | |
|---|---|
| COMPLIANT WITH EUROPEAN STANDARDS | EN 1838<br>EN 60598-1<br>EN 60598-2-22<br>EN 61347-1<br>EN 61347-2-13<br>EN 61347-2-7<br>EN 62031<br>EN 62384<br>EN 62386-101<br>EN 62386-102<br>EN 62386-202<br>EN 62386-207<br>RoHS2 2011/65/UE |
| FUNCTION | Ambient and evacuation lighting |
| INSTALLATION METHOD | Surface mounting (ceiling) |
| LIGHT DISTRIBUTION ELEMENT | Focal lens<br>Refraction lens |
| MODE | Dali<br>Security |
| NOMINAL OPERATING TIME | 3h |
| PROTECTION CLASS | II |
| TYPE OF SWITCHING | Permanent |

## Accessories

**LA341** - VIALED EVO MINIBOX SUSPENDED PLEXI KIT



**LA305** - INHIBITION KIT FOR PERMANENT VERSION



**L99150** - COMMANDER

