
VIALED-EVO-MINIBOX-HIGH
L8123HI-G-BOX


IP42 IK08 12 pcs

VIALED EVO MINIBOX HIGH 5,7W 440lm 1h M/NM GREY AUT


The Vialed Evo MINIBOX is the minimalist surface-mounted version of the Vialed Evo. It comes standard with two lenses, one symmetrical and one asymmetrical, providing more flexibility during installation.

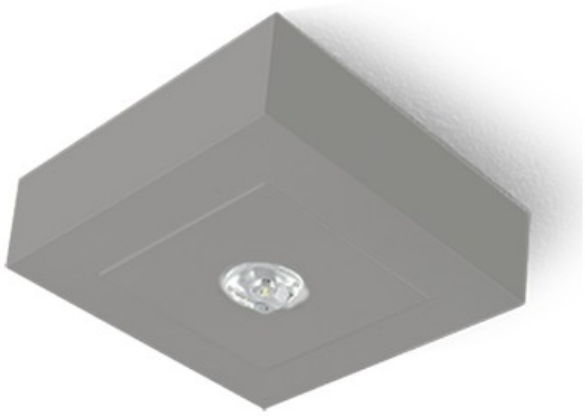


CODE	L8123HI-G-BOX
POWER (W)	5,7W
AUTONOMY (U)	1h
TYPE	Not permanent-Permanent
RESCUE (LM)	440lm
PERMANENT (LM)	440lm
BATTERY	LI-FEPO4



A=130mm B=130mm
C=125mm D=40mm

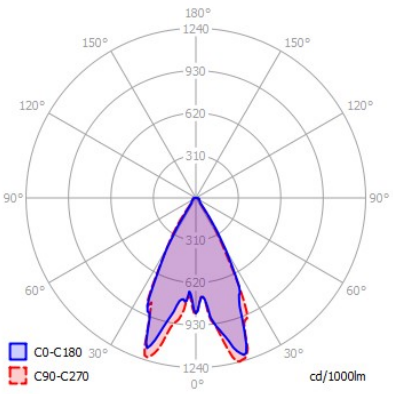

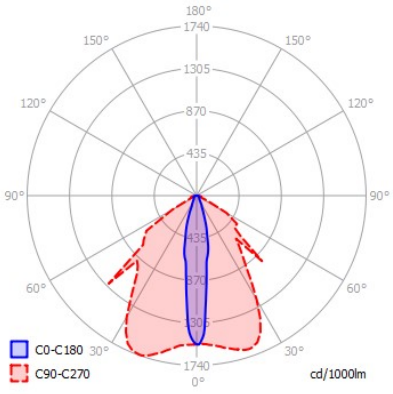

Features

PRODUCT NAME	VIALED-EVO-MINIBOX-HIGH
PRODUCT FUNCTION	LUMINAIRES DE SECOURS LED NON-HERMÉTIQUES
SYSTEM POWER (W) :	5,7W

VIALED-EVO-MINIBOX-HIGH
L8123HI-G-BOX

LIGHT OUTPUT IN EMERGENCY MODE (LM) :	440lm
CONTINUOUS MODE LUMINOUS FLOW (LM) :	440lm
WITH CONNECTION TO A IMPULSE RELAY	YES
WITH REMOTE CONTROL (COMMANDER)	YES
POWER SUPPLY (V) :	220-230V
BATTERY	Li-FeP04 3,2V - 1,5Ah
LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES
PROTECTION CLASS	IP42
HOUSING MATERIAL	POLYCARBONATE
HOUSING COLOUR	GRIS RAL 7035
MATERIAL OF THE COVER	LENTILLE TRANSPARENTE
IMPACT RESISTANCE	IK08
HEIGHT/DEPTH (MM) :	40mm
LENGTH (MM) :	130mm
WIDTH (MM) :	130mm
MOUNTING WIDTH	125mm
PRODUCT WEIGHT (G) :	1200GR
NUMBER OF PRODUCTS PER BOX	12
INCANDESCENT WIRE 850°C	OUI
BATTERY STATUS	LI-FEPO4
VOLTAGE TYPE	AC
NONIMAL LIFETIME L70/B50 (H) :	50.000H (L70B50)
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	0°C / +40 °C
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES	YES
BEBAT CODE	B110020446
RECUPEL CODE	5.56
BATTERY WEIGHT (G) :	41
EAN PACK	8021046359916

VIALED-EVO-MINIBOX-HIGH
L8123HI-G-BOX


COMPLIANT WITH EUROPEAN STANDARDS	EN 1838 EN 60598-1 EN 60598-2-22 EN 61347-1 EN 61347-2-13 EN 61347-2-7 EN 62031 EN 62034 EN 62384 RoHS2 2011/65/UE
FUNCTION	Ambient and evacuation lighting
INSTALLATION METHOD	Surface mounting (ceiling)
LIGHT DISTRIBUTION ELEMENT	Focal lens Refraction lens
MODE	Autotest Security
NOMINAL OPERATING TIME	1h
PROTECTION CLASS	II
TYPE OF SWITCHING	Not permanent Permanent

Accessories

LA341 - VIALED EVO MINIBOX SUSPENDED PLEXI KIT



LA305 - INHIBITION KIT FOR PERMANENT VERSION



L99150 - COMMANDER

