# VIALED-EVO-MINIBOX-HIGH
## L8125HI-B-BOX


IP42 IK08 12 pcs

**VIALED EVO MINIBOX HIGH 5,7W 410lm 1h M/NM WHITE SPY SYSTEM**


The Vialed Evo MINIBOX HIGH is a minimalist version of the Vialed High, specially designed for ceiling heights of up to 10 meters. It comes standard with two lenses, one symmetrical and one asymmetrical, providing greater flexibility during installation.




| | |
|---|---|
| **CODE** | L8125HI-B-BOX |
| **POWER (W)** | 5,7W |
| **AUTONOMY (U)** | 1h |
| **TYPE** | Not permanent-Permanent |
| **RESCUE (LM)** | 410lm |
| **PERMANENT (LM)** | 410lm |
| **BATTERY** | LI-FEPO4 |




A=130mm B=130mm
C=125mm D=40mm

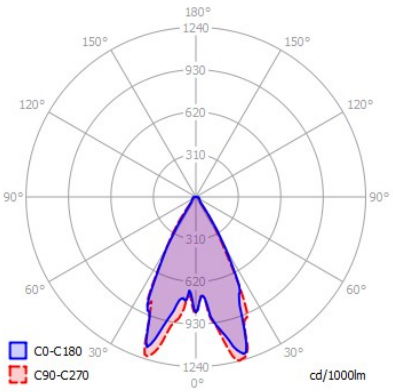

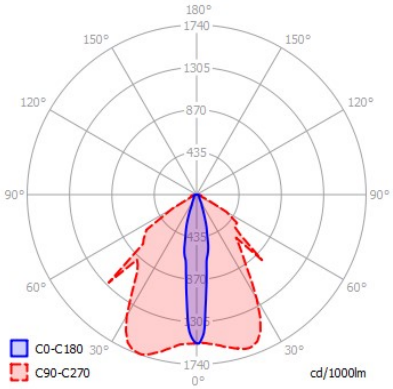
## Features

| | |
|---|---|
| PRODUCT NAME | VIALED-EVO-MINIBOX-HIGH |
| PRODUCT FUNCTION | LUMINAIRES DE SECOURS LED NON-HERMÉTIQUES |

# VIALED-EVO-MINIBOX-HIGH
## L8125HI-B-BOX

| | |
|---|---|
| SYSTEM POWER (W) : | 5,7W |
| LIGHT OUTPUT IN EMERGENCY MODE (LM) : | 410lm |
| CONTINUOUS MODE LUMINOUS FLOW (LM) : | 410lm |
| SURVEILLANCE SYSTEM INSTALLATION | SURVEILLANCE CENTRALISEE |
| WITH CONNECTION TO A IMPULSE RELAY | YES |
| WITH REMOTE CONTROL (COMMANDER) | YES |
| POWER SUPPLY (V) : | 220-230V |
| BATTERY | Li-FeP04 3,2V - 1,5Ah |
| BATTERY RECHARGE TIME (H) : | 12H |
| LIGHT SOURCE | LED |
| WITH LIGHT SOURCE | YES |
| PROTECTION CLASS | IP42 |
| HOUSING MATERIAL | POLYCARBONATE |
| HOUSING COLOUR | WHITE RAL 9003 |
| MATERIAL OF THE COVER | LENTILLE TRANSPARENTE |
| IMPACT RESISTANCE | IK08 |
| HEIGHT/DEPTH (MM) : | 40mm |
| LENGTH (MM) : | 130mm |
| WIDTH (MM) : | 130mm |
| MOUNTING WIDTH | 125mm |
| PRODUCT WEIGHT (G) : | 1400GR |
| NUMBER OF PRODUCTS PER BOX | 12 |
| INCANDESCENT WIRE 850°C | OUI |
| CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC | YES |
| BATTERY STATUS | LI-FEPO4 |
| VOLTAGE TYPE | AC |
| NONIMAL LIFETIME L70/B50 (H) : | 50.000H (L70B50) |
| RATED AMBIENT TEMPERATURE TO IEC 62722-2-1 | 0°C / +40 °C |
| GUARANTEE | 5 YEARS |
| TYPE OF PACKAGING | CARTON BOX |
| NUMBER OF UNITS IN PACKAGING | 1 |
| INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES | YES |
| BEBAT CODE | B209035100 |
| RECUPEL CODE | 5.56 |
| BATTERY WEIGHT (G) : | 41 |
| EAN | 8021046122411 |

# VIALED-EVO-MINIBOX-HIGH
## L8125HI-B-BOX


| | |
|---|---|
| COMPLIANT WITH EUROPEAN STANDARDS | EN 60598-1<br>EN 60598-2-22<br>EN 61347-1<br>EN 61347-2-13<br>EN 61347-2-7<br>EN 62031<br>EN 62384<br>RoHS2 2011/65/UE |
| FUNCTION | Ambient and evacuation lighting<br>Ambient lighting (anti-panic) |
| INSTALLATION METHOD | Surface mounting (ceiling) |
| LIGHT DISTRIBUTION ELEMENT | Focal lens<br>Refraction lens |
| MODE | Bus/spy system<br>Security |
| NOMINAL OPERATING TIME | 1h |
| PROTECTION CLASS | II |
| TYPE OF SWITCHING | Not permanent<br>Permanent |

## Accessories

**LA341** - VIALED EVO MINIBOX SUSPENDED PLEXI KIT



**LA305** - INHIBITION KIT FOR PERMANENT VERSION



**L99150** - COMMANDER

