VIALED-EVO-MINIBOX-HIGH
L8125HI-B-DALI-BOX


IP42 IK08 12 pcs

VIALED EVO MINIBOX HIGH 5,7W 410lm 1h M/NM WHITE DALI


The Vialed Evo MINIBOX HIGH is a minimalist version of the Vialed High, specially designed for ceiling heights of up to 10 meters. It comes standard with two lenses, one symmetrical and one asymmetrical, providing greater flexibility during installation.




CODE	L8125HI-B-DALI-BOX
POWER (W)	5,7W
AUTONOMY (U)	1h
TYPE	Permanent
RESCUE (LM)	410lm
PERMANENT (LM)	410lm
BATTERY	LI-FEPO4



A=130mm B=130mm
C=125mm D=40mm

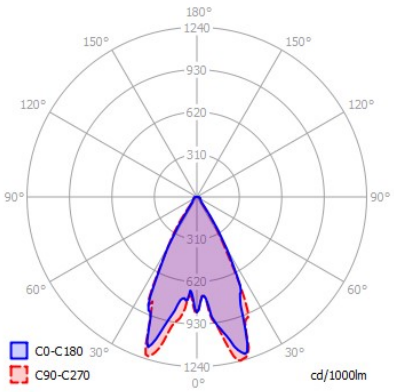

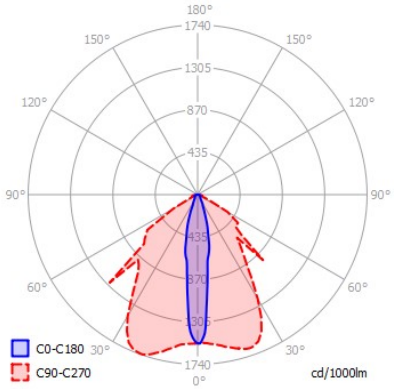

Features

PRODUCT NAME	VIALED-EVO-MINIBOX-HIGH
PRODUCT FUNCTION	LUMINAIRES DE SECOURS LED NON-HERMÉTIQUES

VIALED-EVO-MINIBOX-HIGH
L8125HI-B-DALI-BOX

SYSTEM POWER (W) :	5,7W
LIGHT OUTPUT IN EMERGENCY MODE (LM) :	410lm
CONTINUOUS MODE LUMINOUS FLOW (LM) :	410lm
SURVEILLANCE SYSTEM INSTALLATION	DALI
WITH CONNECTION TO A IMPULSE RELAY	YES
WITH REMOTE CONTROL (COMMANDER)	YES
POWER SUPPLY (V) :	220-230V
BATTERY	Li-FeP04 3,2V - 1,5Ah
BATTERY RECHARGE TIME (H) :	12H
LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES
PROTECTION CLASS	IP42
HOUSING MATERIAL	POLYCARBONATE
HOUSING COLOUR	WHITE RAL 9003
MATERIAL OF THE COVER	LENTILLE TRANSPARENTE
IMPACT RESISTANCE	IK08
HEIGHT/DEPTH (MM) :	40mm
LENGTH (MM) :	130mm
WIDTH (MM) :	130mm
MOUNTING WIDTH	125mm
PRODUCT WEIGHT (G) :	1200GR
NUMBER OF PRODUCTS PER BOX	12
INCANDESCENT WIRE 850°C	OUI
CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC	YES
BATTERY STATUS	LI-FEPO4
VOLTAGE TYPE	AC
NONIMAL LIFETIME L70/B50 (H) :	50.000H (L70B50)
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	0°C / +40 °C
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES	YES
BEBAT CODE	B209035100
RECUPEL CODE	5.56
BATTERY WEIGHT (G) :	41
EAN	8021046122428

VIALED-EVO-MINIBOX-HIGH
L8125HI-B-DALI-BOX


COMPLIANT WITH EUROPEAN STANDARDS	EN 60598-1 EN 60598-2-22 EN 61347-1 EN 61347-2-13 EN 61347-2-7 EN 62031 EN 62384 EN 62386-101 EN 62386-102 EN 62386-202 EN 62386-207 RoHS2 2011/65/UE
FUNCTION	Ambient and evacuation lighting Ambient lighting (anti-panic)
INSTALLATION METHOD	Surface mounting (ceiling)
LIGHT DISTRIBUTION ELEMENT	Focal lens Refraction lens
MODE	Dali Security
NOMINAL OPERATING TIME	1h
PROTECTION CLASS	II
TYPE OF SWITCHING	Permanent

Accessories

LA341 - VIALED EVO MINIBOX SUSPENDED PLEXI KIT



LA305 - INHIBITION KIT FOR PERMANENT VERSION



L99150 - COMMANDER

