VIALED-EVO-MINIBOX
L8125-N-DALI-BOX


IP42 IK08 12 pcs

VIALED EVO MINIBOX 5,7W 410lm 1h M/NM BLACK DALI


The Vialed Evo MINIBOX is the minimalist surface-mounted version of the Vialed Evo. It comes standard with two lenses, one symmetrical and one asymmetrical, providing more flexibility during installation.




CODE	L8125-N-DALI-BOX
POWER (W)	5,7W
AUTONOMY (U)	2h
TYPE	Permanent
RESCUE (LM)	410lm
PERMANENT (LM)	410lm
BATTERY	



A=130mm B=130mm
C=125mm D=40mm

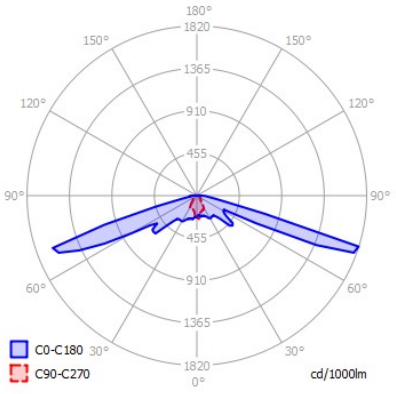

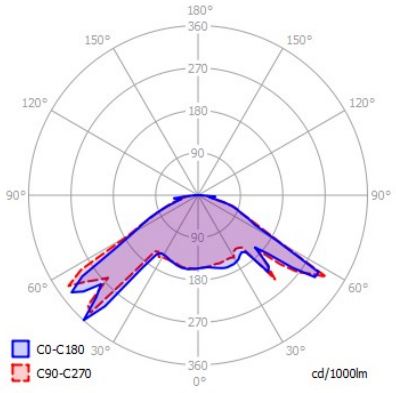

Features

PRODUCT NAME	VIALED-EVO-MINIBOX
PRODUCT FUNCTION	LUMINAIRES DE SECOURS LED NON-HERMÉTIQUES
SYSTEM POWER (W) :	5,7W

VIALED-EVO-MINIBOX
L8125-N-DALI-BOX

LIGHT OUTPUT IN EMERGENCY MODE (LM) :	410lm
CONTINUOUS MODE LUMINOUS FLOW (LM) :	410lm
SURVEILLANCE SYSTEM INSTALLATION	DALI
WITH CONNECTION TO A IMPULSE RELAY	YES
WITH REMOTE CONTROL (COMMANDER)	YES
POWER SUPPLY (V) :	220-230V
BATTERY	LiFePO4
LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES
PROTECTION CLASS	IP42
HOUSING MATERIAL	POLYCARBONATE
HOUSING COLOUR	NOIR RAL 9005
MATERIAL OF THE COVER	LENTILLE TRANSPARENTE
IMPACT RESISTANCE	IK08
HEIGHT/DEPTH (MM) :	40mm
LENGTH (MM) :	130mm
WIDTH (MM) :	130mm
MOUNTING WIDTH	125mm
PRODUCT WEIGHT (G) :	1200GR
NUMBER OF PRODUCTS PER BOX	12
INCANDESCENT WIRE 850°C	OUI
VOLTAGE TYPE	AC
NONIMAL LIFETIME L70/B50 (H) :	50.000H (L70B50)
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	0°C / +40 °C
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES	YES
BEBAT CODE	B209035100
RECUPEL CODE	5.56
BATTERY WEIGHT (G) :	41
EAN	8021046125474
EAN PACK	8021046359244

VIALED-EVO-MINIBOX
L8125-N-DALI-BOX


COMPLIANT WITH EUROPEAN STANDARDS	EN 1838 EN 60598-1 EN 60598-2-22 EN 61347-1 EN 61347-2-13 EN 61347-2-7 EN 62031 EN 62384 EN 62386-101 EN 62386-102 EN 62386-202 EN 62386-207 RoHS2 2011/65/UE
FUNCTION	Ambient and evacuation lighting
INSTALLATION METHOD	Surface mounting (ceiling)
LIGHT DISTRIBUTION ELEMENT	Focal lens Refraction lens
MODE	Dali Security
NOMINAL OPERATING TIME	2h
PROTECTION CLASS	II
TYPE OF SWITCHING	Permanent

Accessories

LA341 - VIALED EVO MINIBOX SUSPENDED PLEXI KIT



LA305 - INHIBITION KIT FOR PERMANENT VERSION



L99150 - COMMANDER

