VIALED-EVO-MINIBOX
L8126-B-DALI-BOX


IP42 IK08 12 pcs

VIALED EVO MINIBOX 4,8W 360lm 3h M/NM WHITE DALI


The Vialed Evo MINIBOX is the minimalist surface-mounted version of the Vialed Evo. It comes standard with two lenses, one symmetrical and one asymmetrical, providing more flexibility during installation.




CODE	L8126-B-DALI-BOX
POWER (W)	4,8W
AUTONOMY (U)	3h
TYPE	Permanent
RESCUE (LM)	360lm
PERMANENT (LM)	360lm
BATTERY	LI-FEPO4



A=130mm B=130mm
C=125mm D=40mm

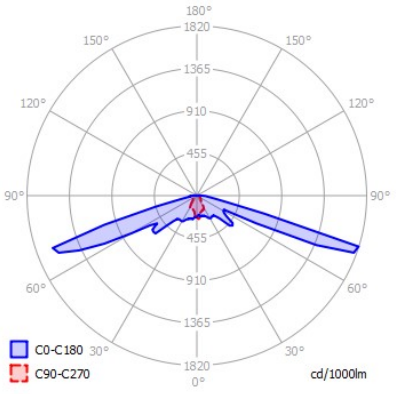

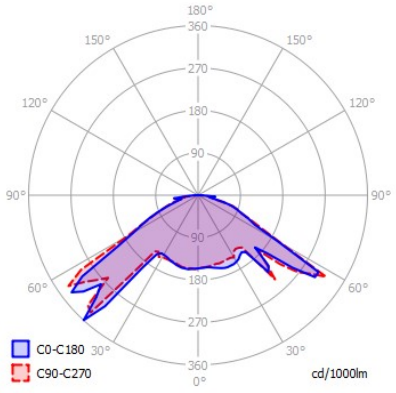

Features

PRODUCT NAME	VIALED-EVO-MINIBOX
PRODUCT FUNCTION	LUMINAIRES DE SECOURS LED NON-HERMÉTIQUES
SYSTEM POWER (W) :	4,8W

VIALED-EVO-MINIBOX
L8126-B-DALI-BOX

LIGHT OUTPUT IN EMERGENCY MODE (LM) :	360lm
CONTINUOUS MODE LUMINOUS FLOW (LM) :	360lm
SURVEILLANCE SYSTEM INSTALLATION	DALI
WITH CONNECTION TO A IMPULSE RELAY	YES
WITH REMOTE CONTROL (COMMANDER)	YES
POWER SUPPLY (V) :	220-230V
BATTERY	Li-FeP04 3,2V 3Ah
BATTERY RECHARGE TIME (H) :	12H
LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES
PROTECTION CLASS	IP42
HOUSING MATERIAL	POLYCARBONATE
HOUSING COLOUR	WHITE RAL 9003
MATERIAL OF THE COVER	LENTILLE TRANSPARENTE
IMPACT RESISTANCE	IK08
HEIGHT/DEPTH (MM) :	40mm
LENGTH (MM) :	130mm
WIDTH (MM) :	130mm
MOUNTING WIDTH	125mm
PRODUCT WEIGHT (G) :	1200GR
NUMBER OF PRODUCTS PER BOX	12
INCANDESCENT WIRE 850°C	OUI
CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC	YES
BATTERY STATUS	LI-FEPO4
VOLTAGE TYPE	AC
NONIMAL LIFETIME L70/B50 (H) :	50.000H (L70B50)
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	0°C / +40 °C
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES	YES
BEBAT CODE	B209035180
RECUPEL CODE	5.56
BATTERY WEIGHT (G) :	81 gr.
EAN	8021046122367

VIALED-EVO-MINIBOX
L8126-B-DALI-BOX


COMPLIANT WITH EUROPEAN STANDARDS	EN 1838 EN 60598-1 EN 60598-2-22 EN 61347-1 EN 61347-2-13 EN 61347-2-7 EN 62031 EN 62384 EN 62386-101 EN 62386-102 EN 62386-202 EN 62386-207 RoHS2 2011/65/UE
FUNCTION	Ambient and evacuation lighting Ambient lighting (anti-panic)
INSTALLATION METHOD	Surface mounting (ceiling)
LIGHT DISTRIBUTION ELEMENT	Focal lens Refraction lens
MODE	Dali Security
NOMINAL OPERATING TIME	3h
PROTECTION CLASS	II
TYPE OF SWITCHING	Permanent

Accessories

LA341 - VIALED EVO MINIBOX SUSPENDED PLEXI KIT



LA305 - INHIBITION KIT FOR PERMANENT VERSION



L99150 - COMMANDER

