# VIALED-EVO
## L8105-G-WIR


IP20 IP42 IK07 8 pcs

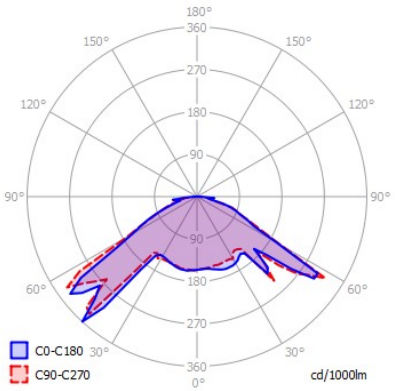
**VIALED EVO 0,4W 1h 450lm NM GREY WIRELESS**

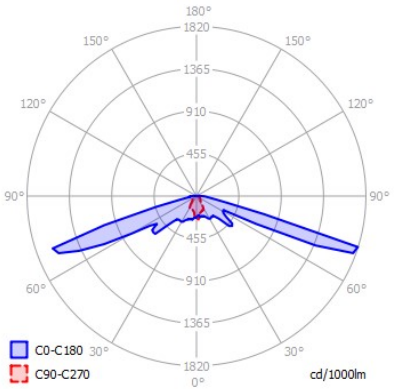
The Vialed EVO delivers a very high light output thanks to its two LEDs. It comes standard with two lenses one symmetrical and one asymmetrical providing greater flexibility during installation. The metal ring is available in white, gray, or black.



| | |
|---|---|
| **CODE** | L8105-G-WIR |
| **POWER (W)** | 0,4W |
| **AUTONOMY (U)** | 1h |
| **TYPE** | Not permanent |
| **RESCUE (LM)** | 450lm |
| **PERMANENT (LM)** | |
| **BATTERY** | LI-FEPO4 |




## Features


| | |
|---|---|
| PRODUCT NAME | VIALED-EVO |
| PRODUCT FUNCTION | LUMINAIRES DE SECOURS LED NON-HERMÉTIQUES |

# VIALED-EVO
## L8105-G-WIR

| | |
|---|---|
| SYSTEM POWER (W) : | 0,4W |
| LIGHT OUTPUT IN EMERGENCY MODE (LM) : | 450lm |
| SURVEILLANCE SYSTEM INSTALLATION | WIRELESS |
| WITH CONNECTION TO A IMPULSE RELAY | YES |
| WITH REMOTE CONTROL (COMMANDER) | YES |
| POWER SUPPLY (V) : | 220-230V |
| BATTERY | Li-FeP04 3,2V - 1,5Ah |
| BATTERY RECHARGE TIME (H) : | 12H |
| LIGHT SOURCE | LED |
| WITH LIGHT SOURCE | YES |
| PROTECTION CLASS | IP20/IP42 |
| HOUSING MATERIAL | FONTE D'ALUMINIUM |
| HOUSING COLOUR | GRIS RAL 7035 |
| MATERIAL OF THE COVER | LENTILLE TRANSPARENTE |
| IMPACT RESISTANCE | IK07 |
| HEIGHT/DEPTH (MM) : | 3,2mm |
| EXTERNAL DIAMETER (MM) : | 85mm |
| FLUSH-MOUNTED DIAMETER (MM) : | 65mm |
| MOUNTING WIDTH | 85mm |
| PRODUCT WEIGHT (G) : | 800GR |
| NUMBER OF PRODUCTS PER BOX | 8 |
| INCANDESCENT WIRE 850°C | OUI |
| CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC | YES |
| BATTERY STATUS | LI-FEPO4 |
| VOLTAGE TYPE | AC |
| NONIMAL LIFETIME L70/B50 (H) : | 50.000H (L70B50) |
| RATED AMBIENT TEMPERATURE TO IEC 62722-2-1 | 0°C / +40 °C |
| GUARANTEE | 5 YEARS |
| TYPE OF PACKAGING | CARTON BOX |
| NUMBER OF UNITS IN PACKAGING | 1 |
| ENEC | YES |
| INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES | YES |
| BEBAT CODE | B110020446 |
| RECUPEL CODE | 5.56 |
| BATTERY WEIGHT (G) : | 41 |
| EAN | 8021046116885 |
| EAN PACK | 8021046327830 |

| | |
|---|---|
| COMPLIANT WITH EUROPEAN STANDARDS | EN 60598-1<br>EN 60598-2-22<br>EN 61347-1<br>EN 61347-2-13<br>EN 61347-2-7<br>EN 62031<br>EN 62384<br>RoHS2 2011/65/UE |
| FUNCTION | Ambient and evacuation lighting<br>Ambient lighting (anti-panic) |
| INSTALLATION METHOD | Built-in<br>Surface mounted recessed |
| LIGHT DISTRIBUTION ELEMENT | Focal lens<br>Refraction lens |
| MODE | Security<br>Wireless/Spy system wireless |
| NOMINAL OPERATING TIME | 1h |
| PROTECTION CLASS | II |
| TYPE OF SWITCHING | Not permanent |

## Accessories

**L99193-B** - VIALED APPARENT BOX 185X185 WHITE 

**L99193-B-PICTO** - VIALED APPARENT BOX WHITE 185X185 FOR PICTO 

**L99194-B** - VIALED RECESSED 165X165 WHITE 


**L99194-B-PICTO** - VIALED RECESSED PLATE 165X165 WHITE FOR PICTO 

**L99193-N** - VIALED APPARENT BOX 185X185 BLACK 


**L99193-N-PICTO** - VIALED APPARENT BOX 185X185 BLACK FOR PICTO 

**L99194-N** - VIALED RECESSED PLATE 165X165 BLACK 

**L99194-N-PICTO** - VIALED RECESSED PLATE 165X165 BLACK FOR PICTO 

**L99193-G** - VIALED APPARENT BOX 185X185 GREY 

**L99193-G-PICTO** - VIALED APPARENT BOX 185X185 GREY FOR PICTO 

**L99194-G** - VIALED RECESSED PLATE 165X165 GREY 

**L99194-G-PICTO** - VIALED RECESSED PLATE 165X165 GREY FOR PICTO 

**L99993-1-2** - VIALED PLEXI 165x80 LEFT & RIGHT 

**L99993-3** - VIALED PLEXI 165x80 DOWN 


**L99993-4** - VIALED PLEXI 165x80 EXIT



**L99993-6** - VIALED PLEXI 165x80 HYDRANT



**L99157** - INHIBITION KIT FOR PERMANENT VERSION




**L99150** - COMMANDER

