VIALED-HIGH
L8125HI-B-WIR


IP20 IP42 IK07 8 pcs

VIALED HIGH 5,7W 1h 440lm M/NM WHITE WIRELESS


The Vialed High is designed for high ceilings. Discreet and efficient, it comes standard with two lenses, one symmetrical and one asymmetrical, providing more flexibility during installation. The metal ring is available




CODE	L8125HI-B-WIR
POWER (W)	5,7W
AUTONOMY (U)	1h
TYPE	Not permanent-Permanent
RESCUE (LM)	440lm
PERMANENT (LM)	440lm
BATTERY	LI-FEPO4



A=85mm B=55mm C=18mm D=3mm
E=175mm F=27mm G=46mm
Ø=65mm

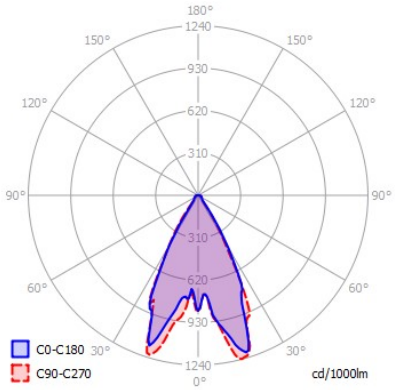

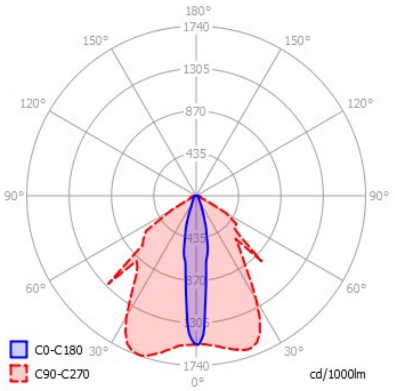

Features

PRODUCT NAME	VIALED-HIGH
PRODUCT FUNCTION	LUMINAIRES DE SECOURS LED NON-HERMÉTIQUES

LINERGY EMERGENCY LIGHTING

VIALED-HIGH
L8125HI-B-WIR


SYSTEM POWER (W) :	5,7W
LIGHT OUTPUT IN EMERGENCY MODE (LM) :	440lm
CONTINUOUS MODE LUMINOUS FLOW (LM) :	440lm
SURVEILLANCE SYSTEM INSTALLATION	WIRELESS
WITH CONNECTION TO A IMPULSE RELAY	YES
WITH REMOTE CONTROL (COMMANDER)	YES
POWER SUPPLY (V) :	220-230V
BATTERY	Li-FeP04 3,2V - 1,5Ah
BATTERY RECHARGE TIME (H) :	12H
LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES
PROTECTION CLASS	IP20/IP42
HOUSING MATERIAL	FONTE D'ALUMINIUM
HOUSING COLOUR	WHITE RAL 9003
MATERIAL OF THE COVER	LENTILLE TRANSPARENTE
IMPACT RESISTANCE	IK07
HEIGHT/DEPTH (MM) :	3,2mm
EXTERNAL DIAMETER (MM) :	85mm
FLUSH-MOUNTED DIAMETER (MM) :	65mm
MOUNTING WIDTH	85mm
PRODUCT WEIGHT (G) :	1600GR
NUMBER OF PRODUCTS PER BOX	8
INCANDESCENT WIRE 850°C	OUI
CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC	YES
BATTERY STATUS	LI-FEPO4
VOLTAGE TYPE	AC
NONIMAL LIFETIME L70/B50 (H) :	50.000H (L70B50)
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	0°C / +40 °C
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
ENEC	YES
INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES	YES
BEBAT CODE	B209035100
RECUPEL CODE	5.56
BATTERY WEIGHT (G) :	41
EAN	8021046117028
EAN PACK	8021046327977

VIALED-HIGH
L8125HI-B-WIR


COMPLIANT WITH EUROPEAN STANDARDS	EN 60598-1 EN 60598-2-22 EN 61347-1 EN 61347-2-13 EN 61347-2-7 EN 62031 EN 62384 RoHS2 2011/65/UE
FUNCTION	Ambient and evacuation lighting Ambient lighting (anti-panic)
INSTALLATION METHOD	Built-in Surface mounted recessed
LIGHT DISTRIBUTION ELEMENT	Focal lens Refraction lens
MODE	Security Wireless/Spy system wireless
NOMINAL OPERATING TIME	1h
PROTECTION CLASS	II
TYPE OF SWITCHING	Not permanent Permanent

Accessories


L99193-B - VIALED APPARENT BOX 185X185 WHITE




L99193-N - VIALED APPARENT BOX 185X185 BLACK



L99193-G - VIALED APPARENT BOX 185X185 GREY



L99157 - INHIBITION KIT FOR PERMANENT VERSION




L99194-B - VIALED RECESSED 165X165 WHITE

L99194-N - VIALED RECESSED PLATE 165X165 BLACK



L99194-G - VIALED RECESSED PLATE 165X165 GREY



L99150 - COMMANDER

