# VIALED-HIGH
## L8125HI-G


IP20 IP42 IK07 8 pcs

**VIALED HIGH 5,7W 1h 440lm M/NM GREY SPY**


The Vialed High is designed for high ceilings. Discreet and efficient, it comes standard with two lenses, one symmetrical and one asymmetrical, providing more flexibility during installation. The metal ring is available





| | |
|---|---|
| **CODE** | L8125HI-G |
| **POWER (W)** | 5,7W |
| **AUTONOMY (U)** | 1h |
| **TYPE** | Not permanent-Permanent |
| **RESCUE (LM)** | 440lm |
| **PERMANENT (LM)** | 440lm |
| **BATTERY** | LI-FEPO4 |




A=85mm B=55mm C=18mm D=3mm
E=175mm F=27mm G=46mm
Ø=65mm

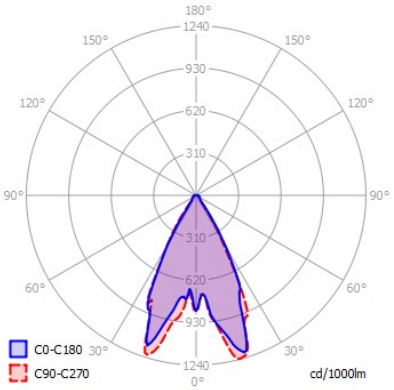

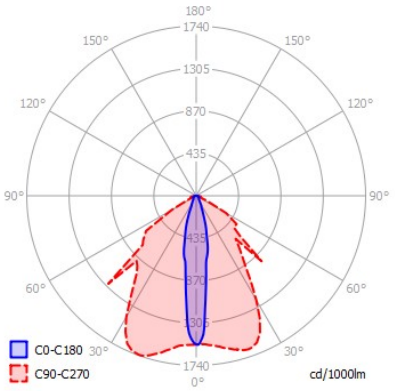
## Features

| | |
|---|---|
| PRODUCT NAME | VIALED-HIGH |
| PRODUCT FUNCTION | LUMINAIRES DE SECOURS LED NON-HERMÉTIQUES |


# VIALED-HIGH
## L8125HI-G

| | |
|---|---|
| SYSTEM POWER (W) : | 5,7W |
| LIGHT OUTPUT IN EMERGENCY MODE (LM) : | 440lm |
| CONTINUOUS MODE LUMINOUS FLOW (LM) : | 440lm |
| SURVEILLANCE SYSTEM INSTALLATION | SURVEILLANCE CENTRALISEE |
| WITH CONNECTION TO A IMPULSE RELAY | YES |
| WITH REMOTE CONTROL (COMMANDER) | YES |
| POWER SUPPLY (V) : | 220-230V |
| BATTERY | Li-FeP04 3,2V - 1,5Ah |
| BATTERY RECHARGE TIME (H) : | 12H |
| LIGHT SOURCE | LED |
| WITH LIGHT SOURCE | YES |
| PROTECTION CLASS | IP20/IP42 |
| HOUSING MATERIAL | FONTE D'ALUMINIUM |
| HOUSING COLOUR | GRIS RAL 7035 |
| MATERIAL OF THE COVER | LENTILLE TRANSPARENTE |
| IMPACT RESISTANCE | IK07 |
| HEIGHT/DEPTH (MM) : | 3,2mm |
| EXTERNAL DIAMETER (MM) : | 85mm |
| FLUSH-MOUNTED DIAMETER (MM) : | 65mm |
| MOUNTING WIDTH | 85mm |
| PRODUCT WEIGHT (G) : | 1600GR |
| NUMBER OF PRODUCTS PER BOX | 8 |
| INCANDESCENT WIRE 850°C | OUI |
| CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC | YES |
| BATTERY STATUS | LI-FEPO4 |
| VOLTAGE TYPE | AC |
| NONIMAL LIFETIME L70/B50 (H) : | 50.000H (L70B50) |
| RATED AMBIENT TEMPERATURE TO IEC 62722-2-1 | 0°C / +40 °C |
| GUARANTEE | 5 YEARS |
| TYPE OF PACKAGING | CARTON BOX |
| NUMBER OF UNITS IN PACKAGING | 1 |
| ENEC | YES |
| INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES | YES |
| BEBAT CODE | B209035100 |
| RECUPEL CODE | 5.56 |
| BATTERY WEIGHT (G) : | 41 |
| EAN | 8021046117905 |
| EAN PACK | 8021046328929 |


| | |
|---|---|
| COMPLIANT WITH EUROPEAN STANDARDS | EN 60598-1<br>EN 60598-2-22<br>EN 61347-1<br>EN 61347-2-13<br>EN 61347-2-7<br>EN 62031<br>EN 62384<br>RoHS2 2011/65/UE |
| FUNCTION | Ambient and evacuation lighting<br>Ambient lighting (anti-panic) |
| INSTALLATION METHOD | Built-in<br>Surface mounted recessed |
| LIGHT DISTRIBUTION ELEMENT | Focal lens<br>Refraction lens |
| MODE | Bus/spy system<br>Security |
| NOMINAL OPERATING TIME | 1h |
| PROTECTION CLASS | II |
| TYPE OF SWITCHING | Not permanent<br>Permanent |

## Accessories


**L99193-B** - VIALED APPARENT BOX 185X185 WHITE




**L99193-N** - VIALED APPARENT BOX 185X185 BLACK



**L99193-G** - VIALED APPARENT BOX 185X185 GREY



**L99157** - INHIBITION KIT FOR PERMANENT VERSION




**L99194-B** - VIALED RECESSED 165X165 WHITE



**L99194-N** - VIALED RECESSED PLATE 165X165 BLACK



**L99194-G** - VIALED RECESSED PLATE 165X165 GREY



**L99150** - COMMANDER

