VIALED-IP65
LVE1801-G-65


IP65 IK07 8 pcs

VIALED EVO 4,5W 750lm GREY CENTRAL BETTERY


The Vialed EVO delivers a very high light output thanks to its two LEDs. It comes standard with two lenses one symmetrical and one asymmetrical providing greater flexibility during installation. The metal ring is available in white, gray, or black.



CODE	LVE1801-G-65
POWER (W)	4,5W
AUTONOMY (U)	
TYPE	
RESCUE (LM)	750lm
PERMANENT (LM)	
BATTERY	

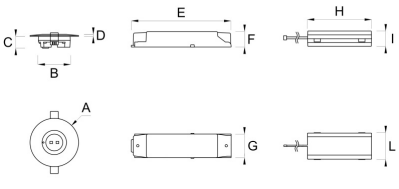

A=85mm B=57mm C=21mm D=3,5mm
E=175mm F=27mm G=46mm
H=144mm I=35mm L=61mm
Ø=65mm

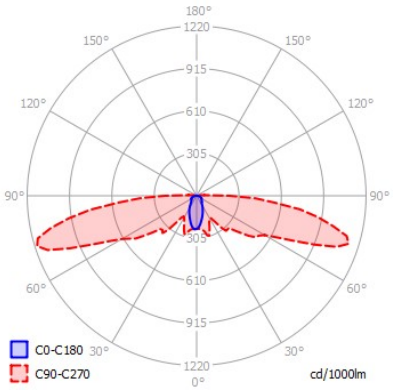

Features

PRODUCT NAME	VIALED-IP65
PRODUCT FUNCTION	LUMINAIRES DE SECOURS LED HERMÉTIQUES

LINERGY
EMERGENCY LIGHTING

VIALED-IP65
LVE1801-G-65

SYSTEM POWER (W) :	4,5W
LIGHT OUTPUT IN EMERGENCY MODE (LM) :	750lm
LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES
PROTECTION CLASS	IP65
HOUSING MATERIAL	FONTE D'ALUMINIUM
HOUSING COLOUR	GRIS RAL 7035
IMPACT RESISTANCE	IK07
HEIGHT/DEPTH (MM) :	3,2mm
EXTERNAL DIAMETER (MM) :	85mm
FLUSH-MOUNTED DIAMETER (MM) :	65mm
MOUNTING WIDTH	85mm
PRODUCT WEIGHT (G) :	800GR
NUMBER OF PRODUCTS PER BOX	8
INCANDESCENT WIRE 850°C	OUI
CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC	YES
NONIMAL LIFETIME L70/B50 (H) :	50.000H (L70B50)
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	0°C / +40 °C
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
ENEC	YES
INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES	YES
BEBAT CODE	-
RECUPEL CODE	5.56
BATTERY WEIGHT (G) :	0
COMPLIANT WITH EUROPEAN STANDARDS	EN 60598-1 EN 60598-2-22 EN 61347-1 EN 61347-2-13 EN 61347-2-7 EN 62031 EN 62384 RoHS2 2011/65/UE
FUNCTION	Ambient and evacuation lighting
INSTALLATION METHOD	Built-in Surface mounted recessed
LIGHT DISTRIBUTION ELEMENT	Focal lens Refraction lens

MODE	Centralized battery Security
PROTECTION CLASS	II