VIALED-IP65
L8125-B-65-WIR


IP65 IK07 8 pcs

VIALED IP65 7,4W 750lm 2h P/NP WHITE WIRELESS


The Vialed EVO delivers a very high light output thanks to its two LEDs. It comes standard with two lenses one symmetrical and one asymmetrical providing greater flexibility during installation. The metal ring is available in white, gray, or black.




CODE	L8125-B-65-WIR
POWER (W)	7,4W
AUTONOMY (U)	2h
TYPE	Not permanent-Permanent
RESCUE (LM)	750lm
PERMANENT (LM)	750lm
BATTERY	LI-FEPO4

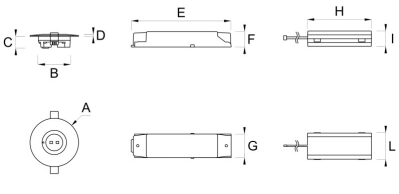

A=85mm B=57mm C=21mm D=3,5mm
E=175mm F=27mm G=46mm
H=144mm I=35mm L=61mm
Ø=65mm

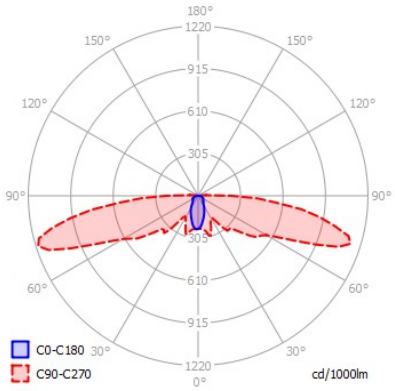

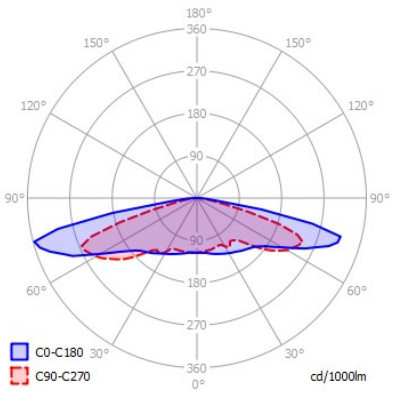

Features

PRODUCT NAME	VIALED-IP65
PRODUCT FUNCTION	LUMINAIRES DE SECOURS LED HERMÉTIQUES

LINERGY
EMERGENCY LIGHTING

VIALED-IP65
L8125-B-65-WIR

SYSTEM POWER (W) :	7,4W
LIGHT OUTPUT IN EMERGENCY MODE (LM) :	750lm
CONTINUOUS MODE LUMINOUS FLOW (LM) :	750lm
SURVEILLANCE SYSTEM INSTALLATION	WIRELESS
WITH CONNECTION TO A IMPULSE RELAY	YES
WITH REMOTE CONTROL (COMMANDER)	YES
POWER SUPPLY (V) :	220-230V
BATTERY	LiFePO4 6,4V - 1,8Ah
BATTERY RECHARGE TIME (H) :	12H
LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES
PROTECTION CLASS	IP65
HOUSING MATERIAL	FONTE D'ALUMINIUM
HOUSING COLOUR	WHITE RAL 9003
MATERIAL OF THE COVER	LENTILLE TRANSPARENTE
IMPACT RESISTANCE	IK07
HEIGHT/DEPTH (MM) :	3,2mm
EXTERNAL DIAMETER (MM) :	85mm
FLUSH-MOUNTED DIAMETER (MM) :	65mm
MOUNTING WIDTH	85mm
PRODUCT WEIGHT (G) :	800GR
NUMBER OF PRODUCTS PER BOX	8
INCANDESCENT WIRE 850°C	OUI
CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC	YES
BATTERY STATUS	LI-FEPO4
VOLTAGE TYPE	AC
NONIMAL LIFETIME L70/B50 (H) :	50.000H (L70B50)
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	0°C / +40 °C
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
ENEC	YES
INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES	YES
BEBAT CODE	B110020446
RECUPEL CODE	5.56
BATTERY WEIGHT (G) :	41
EAN	8021046120912
EAN PACK	8021046340914

VIALED-IP65
L8125-B-65-WIR


COMPLIANT WITH EUROPEAN STANDARDS	EN 60598-1 EN 60598-2-22 EN 61347-1 EN 61347-2-13 EN 61347-2-7 EN 62031 EN 62384 RoHS2 2011/65/UE
FUNCTION	Ambient and evacuation lighting Ambient lighting (anti-panic)
INSTALLATION METHOD	Built-in Surface mounted recessed
LIGHT DISTRIBUTION ELEMENT	Focal lens Refraction lens
MODE	Security Wireless/Spy system wireless
NOMINAL OPERATING TIME	2h
PROTECTION CLASS	II
TYPE OF SWITCHING	Not permanent Permanent

Accessories

L99193-B-IP65 - VIALED APPARENT BOX 190x190 IP65 WHITE



L99193-N-IP65 - VIALED APPARENT BOX IP65 BLACK



L99150 - COMMANDER



L99194-IP65 - VIALED PLEXI IP65



L99157 - INHIBITION KIT FOR PERMANENT VERSION

