# VIALED-IP65
## L8126-B-65


IP65 IK07 8 pcs

**VIALED IP65 7,4W 750lm 3h P/NP WHITE SPY SYSTEM**


The Vialed EVO delivers a very high light output thanks to its two LEDs. It comes standard with two lenses one symmetrical and one asymmetrical providing greater flexibility during installation. The metal ring is available in white, gray, or black.




| | |
|---|---|
| **CODE** | L8126-B-65 |
| **POWER (W)** | 7,4W |
| **AUTONOMY (U)** | 3h |
| **TYPE** | Not permanent-Permanent |
| **RESCUE (LM)** | 750lm |
| **PERMANENT (LM)** | 750lm |
| **BATTERY** | LI-FEPO4 |

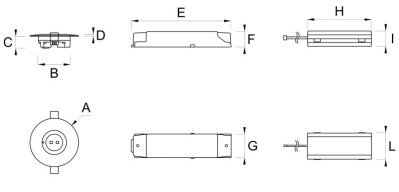


A=85mm B=57mm C=21mm D=3,5mm
E=175mm F=27mm G=46mm
H=144mm I=35mm L=61mm
Ø=65mm

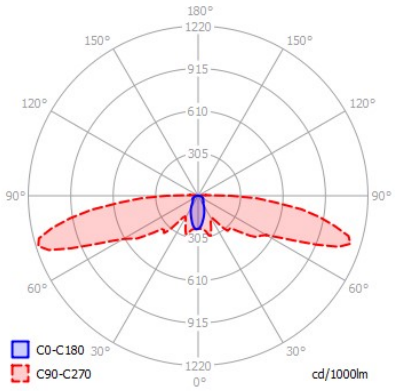

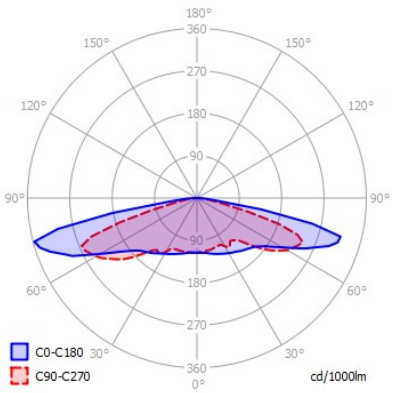
## Features

| | |
|---|---|
| PRODUCT NAME | VIALED-IP65 |
| PRODUCT FUNCTION | LUMINAIRES DE SECOURS LED HERMÉTIQUES |

# VIALED-IP65
## L8126-B-65

| | |
|---|---|
| SYSTEM POWER (W) : | 7,4W |
| LIGHT OUTPUT IN EMERGENCY MODE (LM) : | 750lm |
| CONTINUOUS MODE LUMINOUS FLOW (LM) : | 750lm |
| SURVEILLANCE SYSTEM INSTALLATION | SURVEILLANCE CENTRALISEE |
| WITH CONNECTION TO A IMPULSE RELAY | YES |
| WITH REMOTE CONTROL (COMMANDER) | YES |
| POWER SUPPLY (V) : | 220-230V |
| BATTERY | LiFePO4 6,4V - 3,8Ah |
| BATTERY RECHARGE TIME (H) : | 12H |
| LIGHT SOURCE | LED |
| WITH LIGHT SOURCE | YES |
| PROTECTION CLASS | IP65 |
| HOUSING MATERIAL | FONTE D'ALUMINIUM |
| HOUSING COLOUR | WHITE RAL 9003 |
| MATERIAL OF THE COVER | LENTILLE TRANSPARENTE |
| IMPACT RESISTANCE | IK07 |
| HEIGHT/DEPTH (MM) : | 3,2mm |
| EXTERNAL DIAMETER (MM) : | 85mm |
| FLUSH-MOUNTED DIAMETER (MM) : | 65mm |
| MOUNTING WIDTH | 85mm |
| PRODUCT WEIGHT (G) : | 800GR |
| NUMBER OF PRODUCTS PER BOX | 8 |
| INCANDESCENT WIRE 850°C | OUI |
| CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC | YES |
| BATTERY STATUS | LI-FEPO4 |
| VOLTAGE TYPE | AC |
| NONIMAL LIFETIME L70/B50 (H) : | 50.000H (L70B50) |
| RATED AMBIENT TEMPERATURE TO IEC 62722-2-1 | 0°C / +40 °C |
| GUARANTEE | 5 YEARS |
| TYPE OF PACKAGING | CARTON BOX |
| NUMBER OF UNITS IN PACKAGING | 1 |
| ENEC | YES |
| INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES | YES |
| BEBAT CODE | B209035030 |
| RECUPEL CODE | 5.56 |
| BATTERY WEIGHT (G) : | 81 gr. |
| EAN | 8021046121124 |


| | |
|---|---|
| COMPLIANT WITH EUROPEAN STANDARDS | EN 60598-1<br>EN 60598-2-22<br>EN 61347-1<br>EN 61347-2-13<br>EN 61347-2-7<br>EN 62031<br>EN 62384<br>RoHS2 2011/65/UE |
| FUNCTION | Ambient and evacuation lighting<br>Ambient lighting (anti-panic) |
| INSTALLATION METHOD | Built-in<br>Surface mounted recessed |
| LIGHT DISTRIBUTION ELEMENT | Focal lens<br>Refraction lens |
| MODE | Bus/spy system<br>Security |
| NOMINAL OPERATING TIME | 3h |
| PROTECTION CLASS | II |
| TYPE OF SWITCHING | Not permanent<br>Permanent |

## Accessories

**L99193-B-IP65** - VIALED APPARENT BOX 190x190 IP65 WHITE



**L99193-N-IP65** - VIALED APPARENT BOX IP65 BLACK



**L99150** - COMMANDER



**L99194-IP65** - VIALED PLEXI IP65



**L99157** - INHIBITION KIT FOR PERMANENT VERSION

