VIALED-ROUND
L8123-N-ROUND


IP42 IK08 12 pcs


VIALED ROUND 3,5W 310lm (1h) 150lm (3h) P/NP BLACK AUT


The Vialed ROUND is the minimalist surface-mounted version of the Vialed Evo. It comes standard with two lenses, one symmetrical and one asymmetrical, providing more flexibility during installation.



CODE	L8123-N-ROUND
POWER (W)	3,5W
AUTONOMY (U)	1h
	3h
TYPE	Not permanent-
	Permanent
RESCUE (LM)	310lm (1h) 150lm (3h)
PERMANENT (LM)	310lm - 150lm
BATTERY	LI-FEPO4

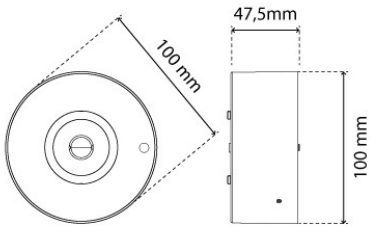





Features

PRODUCT NAME	VIALED-ROUND
PRODUCT FUNCTION	LUMINAIRES DE SECOURS LED NON-HERMÉTIQUES
SYSTEM POWER (W) :	3,5W

VIALED-ROUND
L8123-N-ROUND

LIGHT OUTPUT IN EMERGENCY MODE (LM) :	310lm (1h) 150lm (3h)
CONTINUOUS MODE LUMINOUS FLOW (LM) :	310lm - 150lm
WITH CONNECTION TO A IMPULSE RELAY	YES
POWER SUPPLY (V) :	220-230V
BATTERY	LiFePO4 6.4V 600mAh
BATTERY RECHARGE TIME (H) :	12H
LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES
PROTECTION CLASS	IP42
HOUSING MATERIAL	POLYCARBONATE
HOUSING COLOUR	NOIR RAL 9005
MATERIAL OF THE COVER	LENTILLE TRANSPARENTE
IMPACT RESISTANCE	IK08
HEIGHT/DEPTH (MM) :	47mm
EXTERNAL DIAMETER (MM) :	100mm
PRODUCT WEIGHT (G) :	900GR
NUMBER OF PRODUCTS PER BOX	12
INCANDESCENT WIRE 850°C	OUI
CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC	YES
BATTERY STATUS	LI-FEPO4
VOLTAGE TYPE	AC
NONIMAL LIFETIME L70/B50 (H) :	50.000H (L70B50)
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	-5°C / +40 °C
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES	YES
BEBAT CODE	B210035060
RECUPEL CODE	5.56
BATTERY WEIGHT (G) :	41
EAN	9900000008109
COMPLIANT WITH EUROPEAN STANDARDS	EN 1838 EN 60598-1 EN 60598-2-22 EN 62034 RoHS2 2011/65/UE
FUNCTION	Ambient and evacuation lighting Ambient lighting (anti-panic)

VIALED-ROUND
L8123-N-ROUND

INSTALLATION METHOD	Built-in Surface mounting (ceiling) Surface mounting (wall)
LIGHT DISTRIBUTION ELEMENT	Focal lens Refraction lens
MODE	Autotest Security
NOMINAL OPERATING TIME	1h 3h
PICTOGRAM VISIBILITY	Double-sided Only on one side
PROTECTION CLASS	II
TYPE OF PICTOGRAM	Acrylic glass plate
TYPE OF SWITCHING	Not permanent Permanent

Accessories

L9999-N-1-2 - VIALED ROUND PLEXI 205x105 LEFT & RIGHT BLACK



L9999-N-3 - VIALED ROUND PLEXI 205x105 DOWN WHITE BLACK



L9999-N-4 - VIALED ROUND PLEXI 205x105 EXIT WHITE BLACK



L9999-N-5 - VIALED ROUND PLEXI 205x105 EXTINGUISHER BLACK



L9999-N-6 - VIALED ROUND PLEXI 205x105 HYDRANT BLACK



L9920-N - VIALED ROUND RECESSED KIT BLACK

