# VIALED-ROUND
# L8123-N-ROUND-DALI

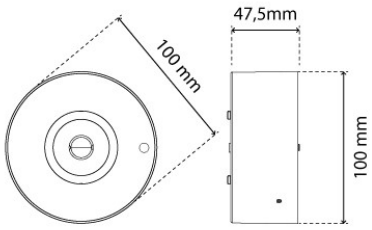
IP42 IK08 12 pcs


**VIALED ROUND 3,5W 310lm (1h) 150lm (3h) P/NP BLACK DALI**


The Vialed ROUND is the minimalist surface-mounted version of the Vialed Evo. It comes standard with two lenses, one symmetrical and one asymmetrical, providing more flexibility during installation.



| | |
|---|---|
| **CODE** | L8123-N-ROUND-DALI |
| **POWER (W)** | 3,5W |
| **AUTONOMY (U)** | 1h |
| | 3h |
| **TYPE** | Not permanent- |
| | Permanent |
| **RESCUE (LM)** | 310lm (1h) 150lm (3h) |
| **PERMANENT (LM)** | 310lm - 150lm |
| **BATTERY** | LI-FEPO4 |




## Features

| | |
|---|---|
| PRODUCT NAME | VIALED-ROUND |
| PRODUCT FUNCTION | LUMINAIRES DE SECOURS LED NON-HERMÉTIQUES |
| SYSTEM POWER (W) : | 3,5W |

LINERGY
EMERGENCY LIGHTING

# VIALED-ROUND
# L8123-N-ROUND-DALI

| | |
|---|---|
| LIGHT OUTPUT IN EMERGENCY MODE (LM) : | 310lm (1h) 150lm (3h) |
| CONTINUOUS MODE LUMINOUS FLOW (LM) : | 310lm - 150lm |
| SURVEILLANCE SYSTEM INSTALLATION | DALI |
| WITH CONNECTION TO A IMPULSE RELAY | YES |
| POWER SUPPLY (V) : | 220-230V |
| BATTERY | LiFePO4 6.4V 600mAh |
| BATTERY RECHARGE TIME (H) : | 12H |
| LIGHT SOURCE | LED |
| WITH LIGHT SOURCE | YES |
| PROTECTION CLASS | IP42 |
| HOUSING MATERIAL | POLYCARBONATE |
| HOUSING COLOUR | NOIR RAL 9005 |
| MATERIAL OF THE COVER | LENTILLE TRANSPARENTE |
| IMPACT RESISTANCE | IK08 |
| HEIGHT/DEPTH (MM) : | 47mm |
| EXTERNAL DIAMETER (MM) : | 100mm |
| PRODUCT WEIGHT (G) : | 900GR |
| NUMBER OF PRODUCTS PER BOX | 12 |
| INCANDESCENT WIRE 850°C | OUI |
| CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC | YES |
| BATTERY STATUS | LI-FEPO4 |
| VOLTAGE TYPE | AC |
| NONIMAL LIFETIME L70/B50 (H) : | 50.000H (L70B50) |
| RATED AMBIENT TEMPERATURE TO IEC 62722-2-1 | -5°C / +40 °C |
| GUARANTEE | 5 YEARS |
| TYPE OF PACKAGING | CARTON BOX |
| NUMBER OF UNITS IN PACKAGING | 1 |
| INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES | YES |
| BEBAT CODE | B110020446 |
| RECUPEL CODE | 5.56 |
| BATTERY WEIGHT (G) : | 41 |
| EAN | 9900000011802 |
| COMPLIANT WITH EUROPEAN STANDARDS | EN 1838<br>EN 60598-1<br>EN 60598-2-22<br>EN 62034<br>RoHS2 2011/65/UE |
| FUNCTION | Ambient and evacuation lighting<br>Ambient lighting (anti-panic) |

# VIALED-ROUND
# L8123-N-ROUND-DALI

| | |
|---|---|
| INSTALLATION METHOD | Built-in<br>Surface mounting (ceiling)<br>Surface mounting (wall) |
| LIGHT DISTRIBUTION ELEMENT | Focal lens<br>Refraction lens |
| MODE | Autotest<br>Security |
| NOMINAL OPERATING TIME | 1h<br>3h |
| PICTOGRAM VISIBILITY | Double-sided<br>Only on one side |
| PROTECTION CLASS | II |
| TYPE OF PICTOGRAM | Acrylic glass plate |
| TYPE OF SWITCHING | Not permanent<br>Permanent |

## Accessories

**L9999-N-1-2** - VIALED ROUND PLEXI 205x105 LEFT & RIGHT BLACK 

**L9999-N-3** - VIALED ROUND PLEXI 205x105 DOWN WHITE BLACK 

**L9999-N-4** - VIALED ROUND PLEXI 205x105 EXIT WHITE BLACK 

**L9920-N** - VIALED ROUND RECESSED KIT BLACK 

**L9999-N-5** - VIALED ROUND PLEXI 205x105 EXTINGUISHER BLACK 

**L9999-N-6** - VIALED ROUND PLEXI 205x105 HYDRANT BLACK 