VIALED-TUBE
LVT1502


IP42 IK07 8 pcs

VIALED TUBE 5,3W 360lm 2h M/NM SPY SYSTEM


With its sleek aluminum body, the Vialed Tube can be installed on the ceiling or suspended. It is suitable for both standard and high-ceiling applications and comes with two lenses, one symmetrical and one asymmetrical.




CODE	LVT1502
POWER (W)	5,3W
AUTONOMY (U)	2h
TYPE	Not permanent-Permanent
RESCUE (LM)	360lm
PERMANENT (LM)	360lm
BATTERY	LI-FEPO4

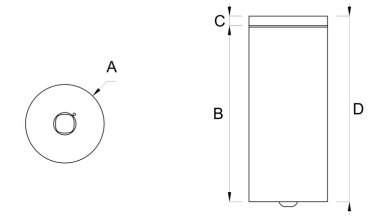

A=100mm B=225mm C=12mm D=237mm

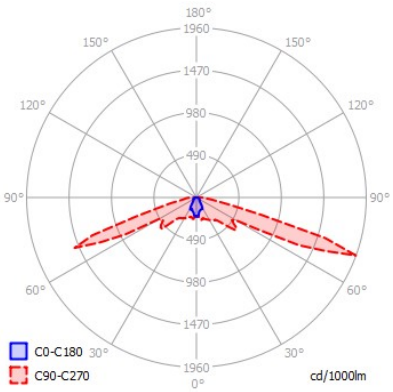

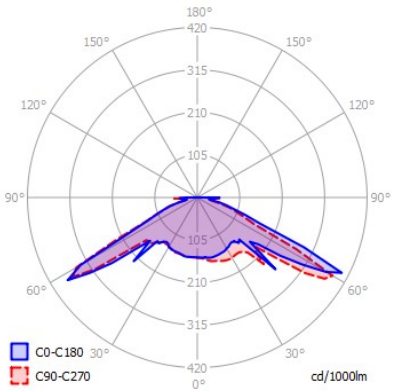

Features

PRODUCT NAME	VIALED-TUBE
PRODUCT FUNCTION	LUMINAIRES DE SECOURS LED NON-HERMÉTIQUES

LINERGY
EMERGENCY LIGHTING

VIALED-TUBE
LVT1502

SYSTEM POWER (W) :	5,3W
LIGHT OUTPUT IN EMERGENCY MODE (LM) :	360lm
CONTINUOUS MODE LUMINOUS FLOW (LM) :	360lm
SURVEILLANCE SYSTEM INSTALLATION	SURVEILLANCE CENTRALISEE
WITH CONNECTION TO A IMPULSE RELAY	YES
WITH REMOTE CONTROL (COMMANDER)	YES
POWER SUPPLY (V) :	220-230V
BATTERY	LiFePO4
BATTERY RECHARGE TIME (H) :	12H
LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES
PROTECTION CLASS	IP42
HOUSING MATERIAL	ALUMINIUM
HOUSING COLOUR	GREY RAL 9007
MATERIAL OF THE COVER	LENTILLE TRANSPARENTE
IMPACT RESISTANCE	IK07
HEIGHT/DEPTH (MM) :	225mm
EXTERNAL DIAMETER (MM) :	100mm
MOUNTING WIDTH	100mm
PRODUCT WEIGHT (G) :	1100GR
NUMBER OF PRODUCTS PER BOX	8
INCANDESCENT WIRE 850°C	OUI
CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC	YES
BATTERY STATUS	LI-FEPO4
VOLTAGE TYPE	AC
NONIMAL LIFETIME L70/B50 (H) :	50.000H (L70B50)
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	0°C / +40 °C
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
ENEC	YES
INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES	YES
BEBAT CODE	B209035100
RECUPEL CODE	5.56
BATTERY WEIGHT (G) :	81 gr.
EAN	8021046121629

VIALED-TUBE
LVT1502


COMPLIANT WITH EUROPEAN STANDARDS	EN 60598-1 EN 60598-2-22 EN 61347-1 EN 61347-2-13 EN 61347-2-7 EN 62031 EN 62384 RoHS2 2011/65/UE
FUNCTION	Ambient and evacuation lighting Ambient lighting (anti-panic)
INSTALLATION METHOD	Chain Hanging Surface mounting (ceiling)
LIGHT DISTRIBUTION ELEMENT	Focal lens Refraction lens
MODE	Bus/spy system Security
NOMINAL OPERATING TIME	2h
PROTECTION CLASS	I
TYPE OF SWITCHING	Not permanent Permanent

Accessories

L99055 - TUBE SUSPENSION KIT



L99157 - INHIBITION KIT FOR PERMANENT VERSION



L99150 - COMMANDER

