
VIALED-WALL
L9130-B-WIR


IP20 IK07 7 pcs

VIALED WALL 4,7W 450lm 2h M/NM WHITE WIRELESS


The Vialed Wall is a wall-mounted luminaire that allows you to adjust the angle of the light source. It comes standard with two lenses, one symmetrical and one asymmetrical, providing more flexibility during installation, and is available in white, gray or black.

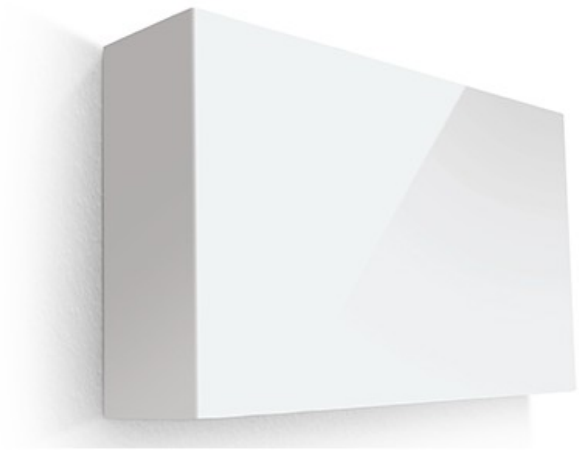


CODE	L9130-B-WIR
POWER (W)	4,7W
AUTONOMY (U)	2h
TYPE	Not permanent-Permanent
RESCUE (LM)	410lm
PERMANENT (LM)	410lm
BATTERY	LI-FEPO4

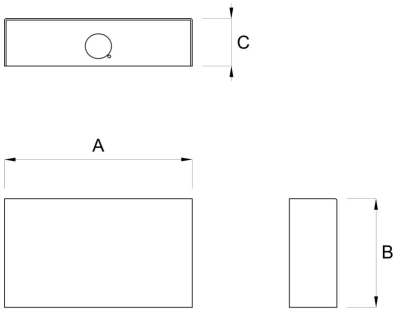

A=207mm B=120mm C=52mm

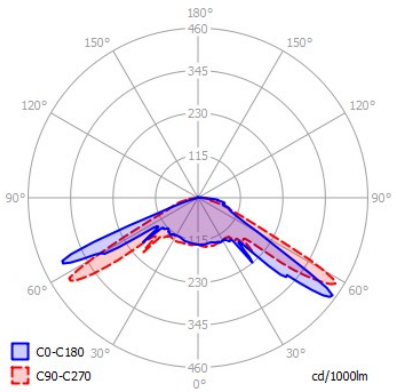

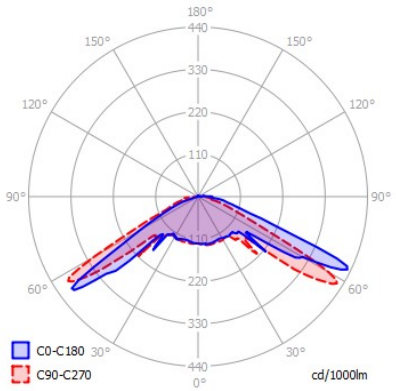

Features

PRODUCT NAME	VIALED-WALL
PRODUCT FUNCTION	LUMINAIRES DE SECOURS LED NON-HERMÉTIQUES

LINERGY
EMERGENCY LIGHTING


VIALED-WALL
L9130-B-WIR

SYSTEM POWER (W) :	4,7W
LIGHT OUTPUT IN EMERGENCY MODE (LM) :	410lm
CONTINUOUS MODE LUMINOUS FLOW (LM) :	410lm
SURVEILLANCE SYSTEM INSTALLATION	WIRELESS
WITH CONNECTION TO A IMPULSE RELAY	YES
WITH REMOTE CONTROL (COMMANDER)	YES
POWER SUPPLY (V) :	220-230V
BATTERY	Li-FeP04 3,2V 3Ah
BATTERY RECHARGE TIME (H) :	12H
LIGHT SOURCE	LED
WITH LIGHT SOURCE	YES
PROTECTION CLASS	IP20
HOUSING MATERIAL	POLYCARBONATE
HOUSING COLOUR	WHITE RAL 9003
MATERIAL OF THE COVER	LENTILLE TRANSPARENTE
IMPACT RESISTANCE	IK07
HEIGHT/DEPTH (MM) :	52mm
LENGTH (MM) :	207mm
WIDTH (MM) :	120mm
MOUNTING WIDTH	207mm
PRODUCT WEIGHT (G) :	800GR
NUMBER OF PRODUCTS PER BOX	7
INCANDESCENT WIRE 850°C	OUI
CONFORMS TO DIRECTIONS: 89/336/EEC, 73/23/EEC, 98/68/EEC	YES
BATTERY STATUS	LI-FEPO4
VOLTAGE TYPE	AC
NONIMAL LIFETIME L70/B50 (H) :	50.000H (L70B50)
RATED AMBIENT TEMPERATURE TO IEC 62722-2-1	0°C / +40 °C
GUARANTEE	5 YEARS
TYPE OF PACKAGING	CARTON BOX
NUMBER OF UNITS IN PACKAGING	1
ENEC	YES
INSTALLATION SUR SURFACES NORMALEMENT INFLAMMABLES	YES
BEBAT CODE	B210035100
RECUPEL CODE	5.56
BATTERY WEIGHT (G) :	81 gr.
EAN	8021046122879
EAN PACK	8021046343212

COMPLIANT WITH EUROPEAN STANDARDS	EN 60598-1 EN 60598-2-22 EN 61347-1 EN 61347-2-13 EN 61347-2-7 EN 62031 EN 62384 RoHS2 2011/65/UE
FUNCTION	Ambient and evacuation lighting Ambient lighting (anti-panic)
INSTALLATION METHOD	Surface mounting (wall)
LIGHT DISTRIBUTION ELEMENT	Focal lens Refraction lens
MODE	Security Wireless/Spy system wireless
NOMINAL OPERATING TIME	2h
PROTECTION CLASS	I
TYPE OF SWITCHING	Not permanent Permanent

Accessories

L99157 - INHIBITION KIT FOR PERMANENT VERSION



L99150 - COMMANDER

